

**STATE OF UTAH**  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT   
(highlight changes)

001

<b>APPLICATION FOR PERMIT TO DRILL</b>				5. MINERAL LEASE NO: ML-47060	6. SURFACE: State
1A. TYPE OF WORK: DRILL <input checked="" type="checkbox"/> REENTER <input type="checkbox"/> DEEPEN <input type="checkbox"/>				7. IF INDIAN, ALLOTTEE OR TRIBE NAME:	
B. TYPE OF WELL: OIL <input type="checkbox"/> GAS <input checked="" type="checkbox"/> OTHER _____ SINGLE ZONE <input type="checkbox"/> MULTIPLE ZONE <input checked="" type="checkbox"/>				8. UNIT or CA AGREEMENT NAME:	
2. NAME OF OPERATOR: WESTPORT OIL & GAS COMPANY, L.P.				9. WELL NAME and NUMBER: STATE 1021-36G	
3. ADDRESS OF OPERATOR: 1368 S 1200 E CITY VERNAL STATE UT ZIP 84078			PHONE NUMBER: (435) 781-7060	10. FIELD AND POOL, OR WILDCAT: NATURAL BUTTES	
4. LOCATION OF WELL (FOOTAGES) AT SURFACE: 1953' FNL 1977' FEL AT PROPOSED PRODUCING ZONE:				11. QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SWNE 36 10S 21E	
14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE: 24.9 MILES SOUTHEAST OF OURAY, UTAH				12. COUNTY: UINTAH	13. STATE: UTAH
15. DISTANCE TO NEAREST PROPERTY OR LEASE LINE (FEET) 1953'		16. NUMBER OF ACRES IN LEASE: 640		17. NUMBER OF ACRES ASSIGNED TO THIS WELL: 40	
18. DISTANCE TO NEAREST WELL (DRILLING, COMPLETED, OR APPLIED FOR) ON THIS LEASE (FEET) REFER TO TOPO C		19. PROPOSED DEPTH: 8,600		20. BOND DESCRIPTION: STATE SURETY RLB0005236	
21. ELEVATIONS (SHOW WHETHER DF, RT, GR, ETC.): 5424.4' UNGRADED GL		22. APPROXIMATE DATE WORK WILL START:		23. ESTIMATED DURATION: TO BE DETERMINED	

**PROPOSED CASING AND CEMENTING PROGRAM**

SIZE OF HOLE	CASING SIZE, GRADE, AND WEIGHT PER FOOT			SETTING DEPTH	CEMENT TYPE, QUANTITY, YIELD, AND SLURRY WEIGHT			
12 1/4"	9 5/8"	32.3#	H-40, STC	1,800	PREM CMT	265 SX	1.18	15.6
7 7/8"	4 1/2"	11.6#	I-80, LTC	8,600	PREM LITE II	390 SX	3.38	11.0
					50/50 POZ G	1410 SX	1.31	14.3

**MAR 18 2005**

**ATTACHMENTS**

VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES:

- |  |  |
|--|--|
| <input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER | <input checked="" type="checkbox"/> COMPLETE DRILLING PLAN                                   |
| <input type="checkbox"/> EVIDENCE OF DIVISION OF WATER RIGHTS APPROVAL FOR USE OF WATER        | <input type="checkbox"/> FORM 5, IF OPERATOR IS PERSON OR COMPANY OTHER THAN THE LEASE OWNER |

NAME (PLEASE PRINT) DEBRA DOMENICI TITLE ENVIRONMENTAL ASSISTANT  
SIGNATURE *Debra Domenici* DATE 3/16/05

(This space for State use only)

API NUMBER ASSIGNED: 43-047-3647

APPROVAL:

*04-18-05*  
*[Signature]*

# T10S, R21E, S.L.B.&M.

# WESTPORT OIL AND GAS COMPANY, L.P.


Well location, STATE #1021-36G, located as shown in the SW 1/4 NE 1/4 of Section 36, T10S, R21E, S.L.B.&M. Uintah County, Utah.

### BASIS OF ELEVATION

TWO WATER TRIANGULATION STATION LOCATED IN THE NW 1/4 OF SECTION 1, T10S, R21E, S.L.B.&M. TAKEN FROM THE BIG PACK MTN NE QUADRANGLE, UTAH, UTAH COUNTY, 7.5 MINUTE SERIES (TOPOGRAPHICAL MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 5238 FEET.

### BASIS OF BEARINGS


BASIS OF BEARINGS IS A G.P.S. OBSERVATION.



SCALE  
CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

*John J. Key*  
REGISTERED LAND SURVEYOR  
REGISTRATION NO. 161319  
STATE OF UTAH

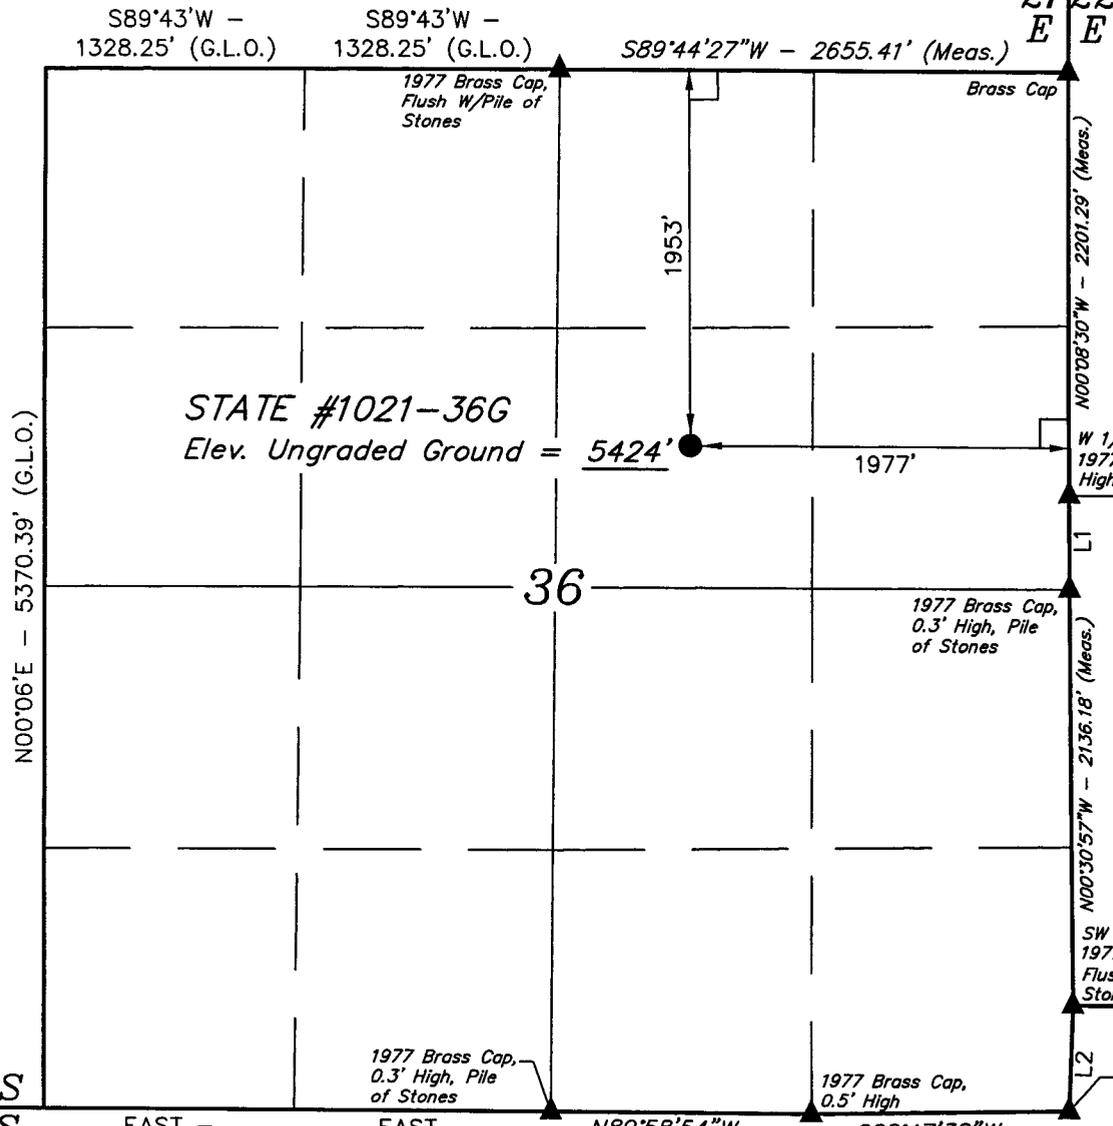

T10S

T11S

EAST - 1290.96' (G.L.O.)    EAST - 1335.18' (G.L.O.)    N89°58'54"W - 1360.59' (Meas.)    S88°47'38"W - 1346.08' (Meas.)

LINE TABLE		
LINE	DIRECTION	LENGTH
L1	N00°13'23"W	484.64'
L2	N02°12'25"E	546.05'

**LEGEND:**

- └─┘ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.

(NAD 83)  
LATITUDE = 39°54'21.75" (39.906042)  
LONGITUDE = 109°29'49.21" (109.497003)  
(NAD 27)  
LATITUDE = 39°54'21.87" (39.906075)  
LONGITUDE = 109°29'46.75" (109.496319)

**UINTAH ENGINEERING & LAND SURVEYING**  
85 SOUTH 200 EAST - VERNAL, UTAH 84078  
(435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 12-1-04	DATE DRAWN: 1-6-05
PARTY A.F. B.G. K.G.		REFERENCES G.L.O. PLAT
WEATHER COLD	FILE WESTPORT OIL AND GAS COMPANY, L.P.	

**From:** Ed Bonner  
**To:** Whitney, Diana  
**Date:** 4/6/2005 4:10:32 PM  
**Subject:** Well Clearance

The following wells have been given cultural resource clearance by the Trust Lands Cultural Resources Group:

Westport Oil & Gas Company



NBU 921-33F  
NBU 921-33G  
NBU 921-33I  
NBU 921-33J  
NBU 921-33K  
NBU 921-33P  
NBU 921-34H  
NBU 921-34K  
NBU 921-34L  
NBU 1022-12I  
NBU 1022-12P  
State 1021-36A  
State 1021-36B  
State 1021-36G  
State 1021-36H  
State 1021-36I  
State 1021-36J  
State 1021-36O  
State 1021-36P

If you have any questions regarding this matter please give me a call.

**CC:** Garrison, LaVonne; Hill, Brad; Hunt, Gil

3,000 PSI

# EOP STACK

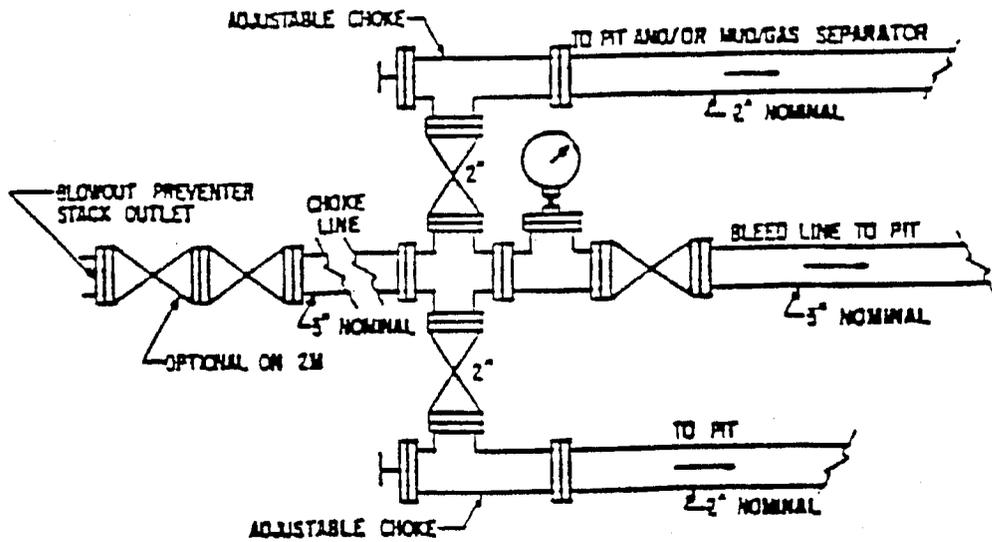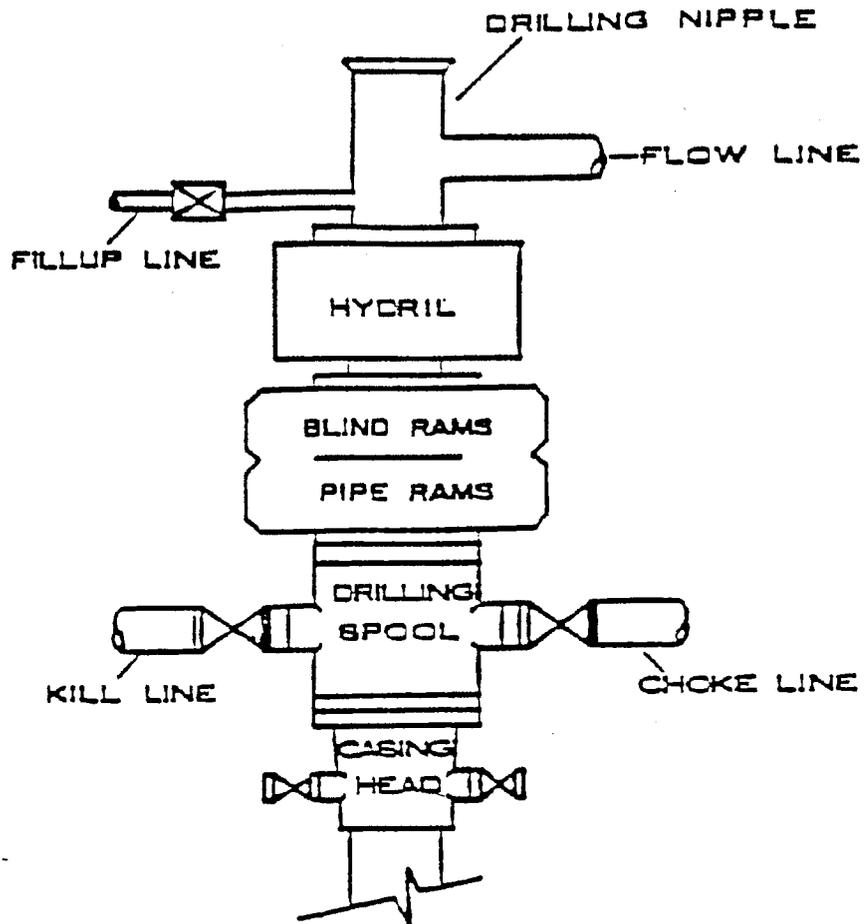

STATE #1021-36G  
SWNE Sec. 36, T10S-R21E  
Uintah County, UT  
ML-47060

ONSHORE ORDER NO. 1

*MULTI-POINT SURFACE USE & OPERATIONS PLAN*

1. **Existing Roads:**

Refer to Topo Map A for directions to the location.

Refer to Topo Maps A and B for location of access roads within a 2-mile radius.

All existing roads will be maintained and kept in good repair during all drilling and completion operations associated with this well.

2. **Planned Access Roads:**

Approximately 0.6 miles of new access road is proposed. Refer to Topo Map B for the location of the proposed access road.

The upgraded and new portions of the access road will be crowned and ditched with a running surface of 18 feet and a maximum disturbed width of 30 feet. Appropriate water control will be installed to control erosion.

*Existence of pipelines; maximum grade; turnouts; major cut and fills, culverts, or bridges; gates, cattle guards, fence cuts, or modifications to existing facilities will be determined at the on-site.*

The access road was centerline flagged during time of staking.

Surfacing material may be necessary, depending upon weather conditions.

Surface disturbance and vehicular traffic will be limited to the approved location and approved access route. Any additional area needed will be approved in advance.

3. **Location of Existing Wells Within a 1-Mile Radius**

Please refer to Topo Map C.

4. **Location of Existing & Proposed Facilities & Pipelines**

*The following guidelines will apply if the well is productive.*

All production facilities will be located on the disturbed portion of the well pad and at a minimum of 25 feet from the toe of the back slope or the top of the fill slope.

A dike will be constructed completely around those production facilities which contain fluids (i.e., production tanks, produced water tanks, and/or heater/treater). These dikes

will be constructed of compacted subsoil, be impervious, hold 100% of the capacity of the largest tank, and be independent of the back cut.

All permanent (on-site six months or longer) above the ground structures constructed or installed, including pumping units, will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the five state Rocky Mountain Inter-Agency Committee.

All facilities will be painted within six months of installation. Facilities required to comply with the Occupational Safety and Health Act (OSHA) will be excluded. The required color is Carlsbad Canyon, standard color number 2.5Y 6/2.

Any necessary pits will be properly fenced to protect livestock and prevent wildlife entry.

Approximately 3280' of up to 8" pipeline is proposed. The pipeline will be butt-welded together. Refer to Topo D for the proposed pipeline.

**5. Location and Type of Water Supply:**

Water for drilling purposes will be obtained from Dalbo Inc.'s underground well located in Ouray, Utah, Sec. 32, T4S, R3E, Water User Claim #43-8496, Application #53617.

Water will be hauled to location over the roads marked on Maps A and B.

No water well is to be drilled on this lease.

**6. Source of Construction Materials**

Surface and subsoil materials in the immediate area will be utilized.

Any gravel will be obtained from a commercial source.

**7. Methods of Handling Waste Materials**

Drill cuttings will be contained and buried in the reserve pit.

Drilling fluids, including salts and chemicals, will be contained in the reserve pit. Upon termination of drilling and completion operations, the liquid contents of the reserve pit will be removed and disposed of at an approved waste disposal facility within 120 days after drilling is terminated.

The reserve pit will be constructed on the location and will not be located within natural drainage, where a flood hazard exists or surface runoff will destroy or damage the pit walls. The reserve pit will be constructed so that it will not leak, break, or allow discharge of liquids.

A plastic reinforced liner and felt will be used, it will be a minimum of 16 mil thick, with sufficient bedding used to cover any rocks. The liner will overlap the pit walls and be covered with dirt and/or rocks to hold it in place. No trash or scrap that could puncture the liner will be disposed of in the pit.

Any spills of oil, gas, salt water, or other noxious fluids will be immediately cleaned up and removed to an approved disposal site.

A chemical porta-toilet will be furnished with the drilling rig.

Garbage, trash, and other waste materials will be collected in a portable, self-contained, fully enclosed trash cage during operations. No trash will be burned on location.

All debris and other waste material not contained in the trash cage will be cleaned up and removed from the location immediately after removal of the drilling rig.

Any open pits will be fenced during the operations. The fencing will be maintained until such time as the pits are backfilled.

No chemicals subject to reporting under SARA Title III (hazardous materials) in an amount greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.

Any produced water from the proposed well will be contained in a water tank and will then be hauled by truck to one of the pre-approved disposal sites: RNI, Sec. 5, T9S, R22E, NBU #159, Sec. 35, T9S, R21E, Ace Oilfield, Sec. 2, T6S, R20E, MC&MC, Sec. 12, T6S, R19E.

#### **8. Ancillary Facilities**

None are anticipated.

#### **9. Well Site Layout: (See Location Layout Diagram)**

The attached Location Layout Diagram describes drill pad cross-sections, cuts and fills, and locations of the mud tanks, reserve pit, flare pit, pipe racks, trailer parking, spoil dirt stockpile(s), and surface material stockpile(s).

Please see the attached diagram to describe rig orientation, parking areas, and access roads.

The reserve pit will be lined, and when the reserve pit is closed, the pit liner will be buried below plow depth.

All pits will be fenced according to the following minimum standards:

39 inch net wire will be used with at least one strand of barbed wire on top of the net wire. Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence.

The net wire shall be no more than two inches above the ground. The barbed wire shall be three inches over the net wire. Total height of the fence shall be at least 42 inches.

Corner posts shall be cemented and/or braced in such a manner to keep the fence tight at all times.

Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any 2 fence posts shall be no greater than 16 feet.

All wire shall be stretched, by using a stretching device, before it is attached to corner posts.

The reserve pit fencing will be on three sides during drilling operations, and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

Location size may change prior to the drilling of the well due to current rig availability. If the proposed location is not large enough to accommodate the drilling rig the location will be re-surveyed and a Form 9 shall be submitted.

**10. Plans for Reclamation of the Surface:**

*Producing Location:*

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, materials, trash, and debris not required for production.

Immediately upon well completion, any hydrocarbons in the pit shall be removed in accordance with 43 CFR 3162.7-1.

A plastic, nylon reinforced liner will be used, it shall be torn and perforated before backfilling of the reserve pit.

Before any dirt work associated with location restoration takes place, the reserve pit shall be as dry as possible. All debris in it will be removed. Other waste and spoil materials will be disposed of immediately upon completion of operations.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. The reserve pit will be reclaimed within 90 days from the date of well completion, weather permitting.

To prevent surface water (s) from standing (ponding) on the reclaimed reserve pit area, final reclamation of the reserve pit will consist of "mounding" the surface three feet above surrounding ground surface to allow the reclaimed pit area to drain effectively.

Upon completion of backfilling, leveling, and recontouring, the stockpiled topsoil will be spread evenly over the reclaimed area(s).

*Dry Hole/Abandoned Location:*

Abandoned well sites, roads, and other disturbed areas will be restored as near as practical to their original condition. Where applicable, these conditions include the re-establishment of irrigation systems, the re-establishment of appropriate soil conditions, and re-establishment of vegetation as specified.

All disturbed surfaces will be recontoured to the approximate natural contours, with reclamation of the well pad and access road to be performed as soon as practical after final abandonment. Reseeding operations will be performed after completion of other reclamation operations.

11. **Surface Ownership:**

SITLA  
675 East 500 South, Suite 500  
Salt Lake City, UT 84102

12. **Other Information:**

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, the approved Plan of Operations, and any applicable Notice of Lessees. The Operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished to the field representative to ensure compliance.

The Operator will control noxious weeds along Rights-Of-Way for roads, pipelines, well sites, or other applicable facilities.

A Class III archaeological survey will be submitted when it is received by our office.

This location is not within 460' from the boundary of the Natural Buttes Unit, nor is it Within 460' of any non-committed tract lying within the boundaries of the Unit.

13. **Lessee's or Operators's Representative & Certification:**

Debra Domenici  
Environmental Assistant  
Westport O&G Co.  
1368 South 1200 East  
Vernal, UT 84078  
(435) 781-7060

Randy Bayne  
Drilling Operations Manager  
Westport O&G Co.  
1368 South 1200 East  
Vernal, UT 84078  
(435)781-7018

Certification: All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved Plan of Operations, and any applicable Notice to Lessees.

The Operator will be fully responsible for the actions of its subcontractors. A complete copy of the approved "Application for Permit to Drill" will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

Westport O&G Co. is considered to be the operator of the subject well. Westport O&G Co. agrees to be responsible under terms and conditions of the lease for the operations conducted upon leased lands.

Bond coverage pursuant to 43 CFR 3104 for lease activities is being provided by State Surety Bond #RLB0005236.

I hereby certify that I, or persons under my supervision, have inspected the proposed drill site and access route, that I am familiar with the conditions that currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and the work associated with the operations proposed herein will be performed by the Operator, its contractors, and subcontractors in conformity with this plan and the terms and conditions under which it is approved.

  
Debra Domenici

  
Date

STATE #1021-36G  
SWNE SECTION 36-T10S-R21E  
UINTAH COUNTY, UTAH  
LEASE NUMBER: ML-47060

ONSHORE ORDER NO. 1  
WESTPORT OIL & GAS COMPANY

***DRILLING PROGRAM***

1. **Estimated Tops of Important Geologic Markers:**

<u>Formation</u>	<u>Depth</u>
Uinta	Surface
Green River	950'
Wasatch	4050'
Mesa Verde	6600'
Total Depth	8600'

2. **Estimated Depths of Anticipated Water, Oil, Gas, or Mineral Formations:**

<u>Substance</u>	<u>Formation</u>	<u>Depth</u>
Gas	Green River	950'
	Wasatch	4050'
	Mesa Verde	6600'
Water	N/A	
Other Minerals	N/A	

3. **Pressure Control Equipment:**

*Please refer to the attached Drilling Program.*

4. **Proposed Casing & Cementing Program:**

*Please refer to the attached Drilling Program.*

5. **Drilling Fluids Program:**

*Please refer to the attached Drilling Program.*

6. **Evaluation Program:**

*Please refer to the attached Drilling Program.*

**7. Abnormal Conditions:**

Maximum anticipated bottomhole pressure at 8600' TD approximately equals 3440 psi (calculated at 0.4 psi/foot).

Maximum anticipated surface pressure equals approximately 1548 psi (bottomhole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot).

**8. Anticipated Starting Dates & Notification of Operations:**

*Please refer to the attached Drilling Program.*

**9. Variances:**

*Please refer to the attached Drilling Program.*

**10. Other Information:**

*Please refer to the attached Drilling Program.*






WESTPORT OIL AND GAS COMPANY, L.P.  
STATE #1021-36G  
SECTION 36, T10S, R21E, S.L.B.&M.

PROCEED IN A WESTERLY DIRECTION FROM VERNAL, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 14.0 MILES TO THE JUNCTION OF STATE HIGHWAY 88; EXIT LEFT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 17.0 MILES TO OURAY, UTAH; PROCEED IN A SOUTHERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 11.2 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 9.6 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHEAST; TURN RIGHT AND PROCEED IN A SOUTHEASTERLY, THEN SOUTHWESTERLY DIRECTION APPROXIMATELY 1.7 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE WEST; TURN RIGHT AND PROCEED IN A WESTERLY, THEN SOUTHWESTERLY DIRECTION APPROXIMATELY 0.1 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE NORTHWEST; TURN RIGHT AND PROCEED IN A NORTHWESTERLY DIRECTION APPROXIMATELY 0.2 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTH; TURN LEFT AND PROCEED IN A SOUTHERLY, THEN WESTERLY DIRECTION APPROXIMATELY 0.2 MILES TO THE JUNCTION OF THIS ROAD AN EXISTING ROAD TO THE NORTHWEST; TURN RIGHT AND PROCEED IN A NORTHWESTERLY, THEN WESTERLY, THEN SOUTHWESTERLY DIRECTION APPROXIMATELY 0.2 MILES TO THE JUNCTION OF THIS ROAD AND THE BEGINNING OF THE PROPOSED ACCESS TO THE NORTHWEST; FOLLOW ROAD FLAGS IN A NORTHWESTERLY, THEN SOUTHWESTERLY DIRECTION APPROXIMATELY 1.7 MILES TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 55.9 MILES.

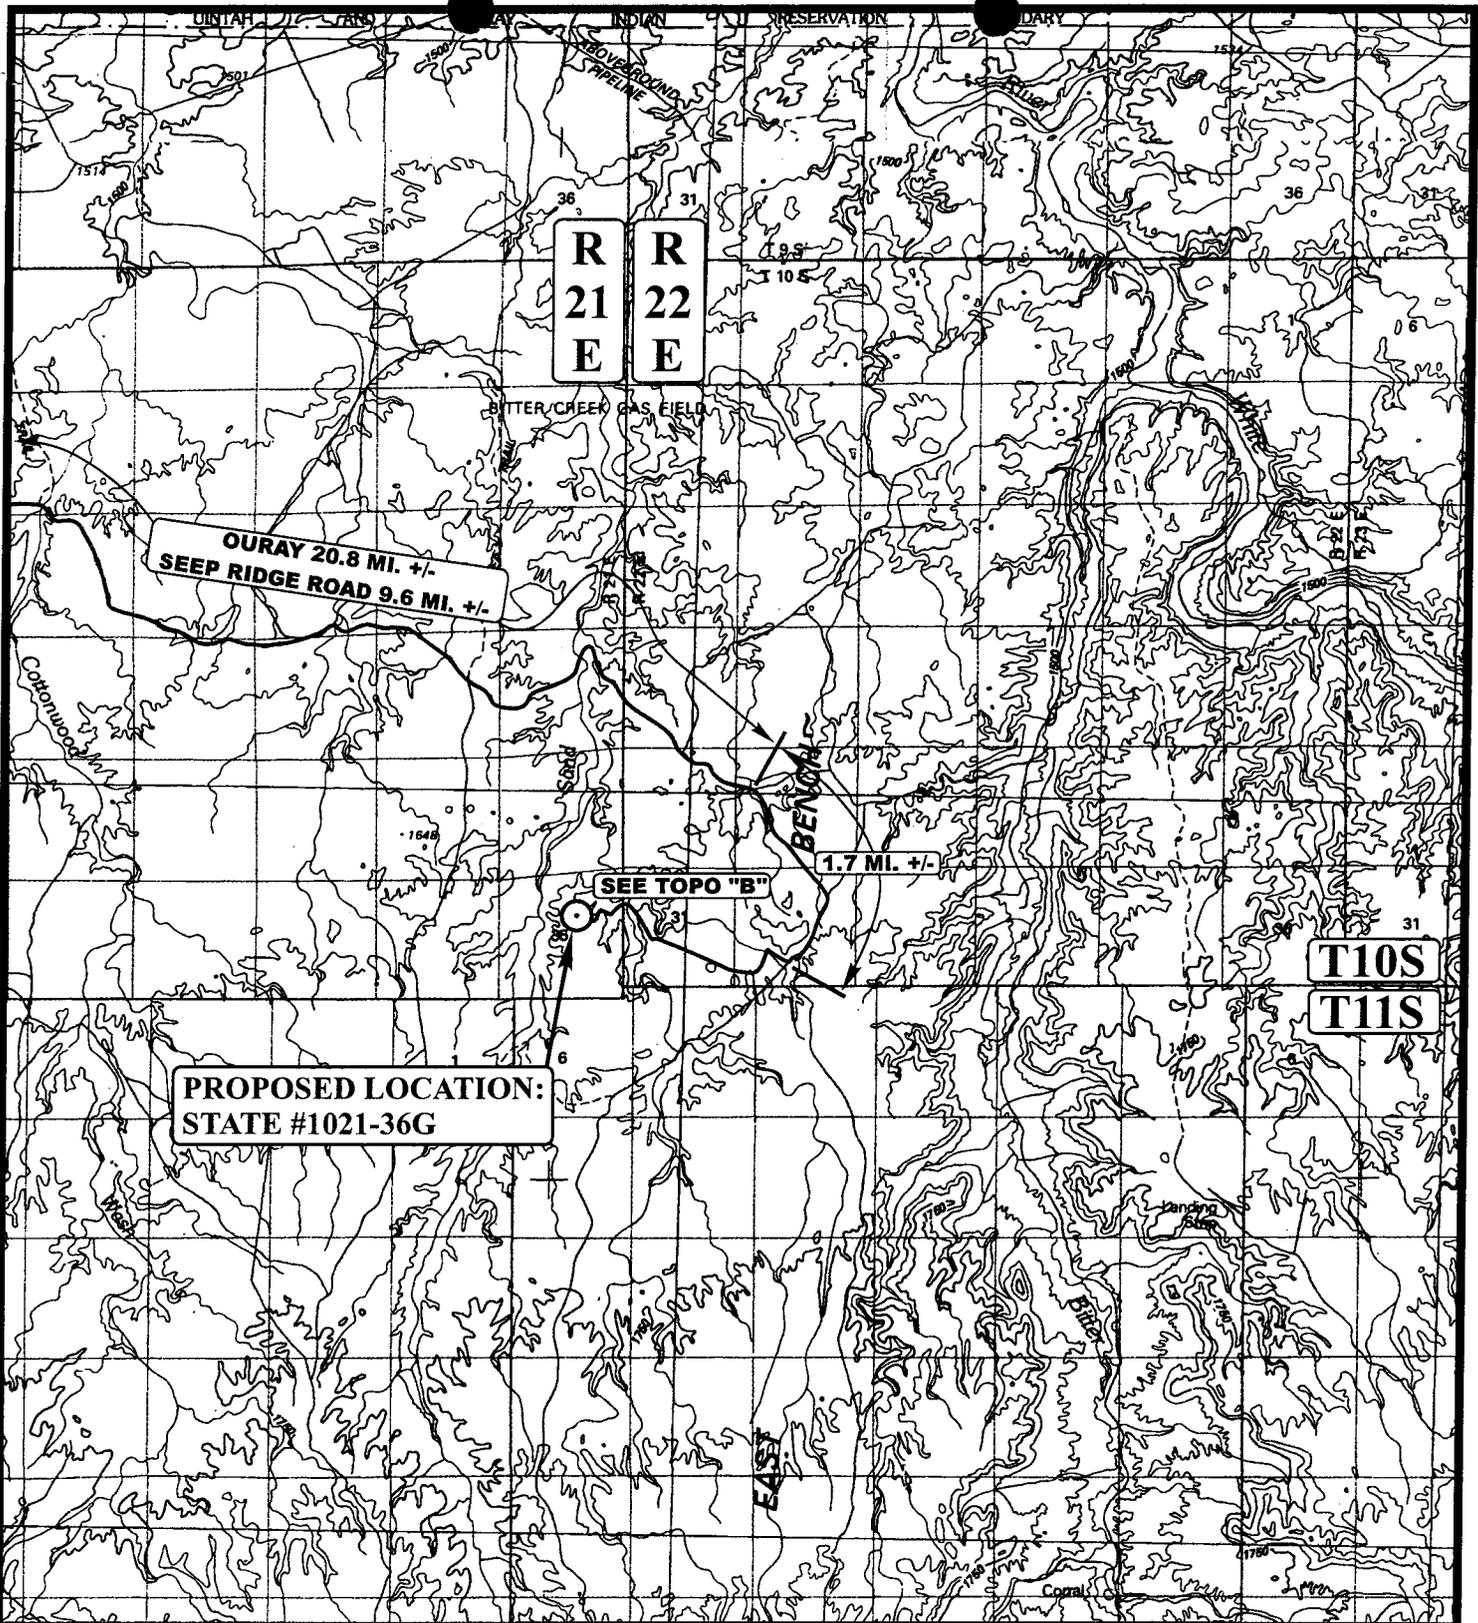

**PROPOSED LOCATION:  
STATE #1021-36G**

**T10S  
T11S**

**LEGEND:**

⊙ PROPOSED LOCATION




**WESTPORT OIL AND GAS COMPANY, L.P.**

STATE #1021-36G  
SECTION 36, T10S, R21E, S.L.B.&M.  
1953' FNL 1977' FEL

**U E S** Uintah Engineering & Land Surveying  
85 South 200 East Vernal, Utah 84078  
(435) 789-1017 \* FAX (435) 789-1813

**TOPOGRAPHIC** 12 13 04  
MAP MONTH DAY YEAR  
SCALE: 1:100,000 DRAWN BY: L.K. REVISED: 00-00-00 **A TOPO**

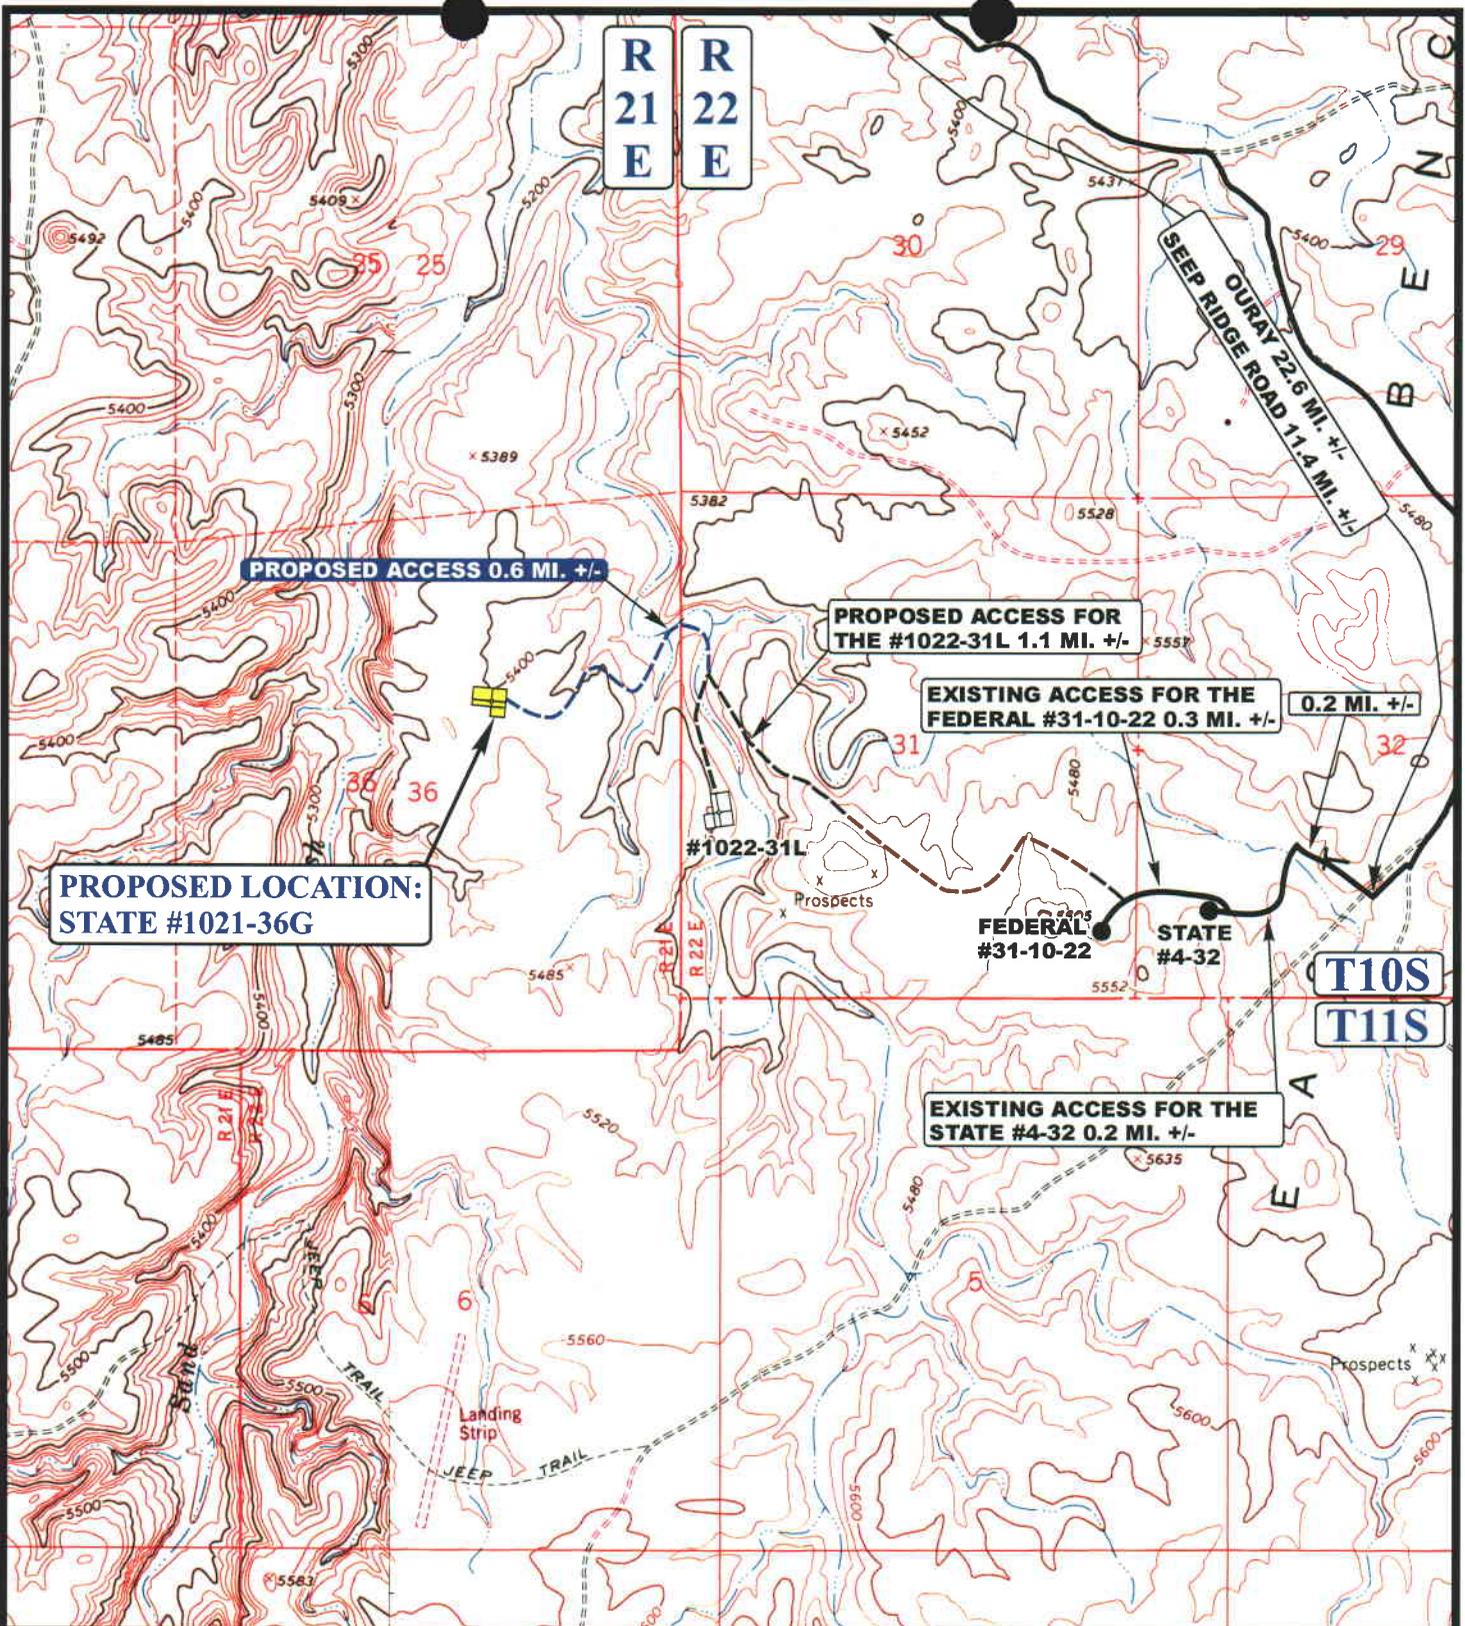

**LEGEND:**

- EXISTING ROAD
- PROPOSED ACCESS ROAD




**WESTPORT OIL AND GAS COMPANY, L.P.**

STATE #1021-36G  
 SECTION 36, T10S, R21E, S.L.B.&M.  
 1953' FNL 1977' FEL

**UEIS** Uintah Engineering & Land Surveying  
 85 South 200 East Vernal, Utah 84078  
 (435) 789-1017 \* FAX (435) 789-1813

**TOPOGRAPHIC MAP** 12 13 04  
 MONTH DAY YEAR  
 SCALE: 1" = 2000' DRAWN BY: L.K. REV: 03-11-05 L.K. **B TOPO**

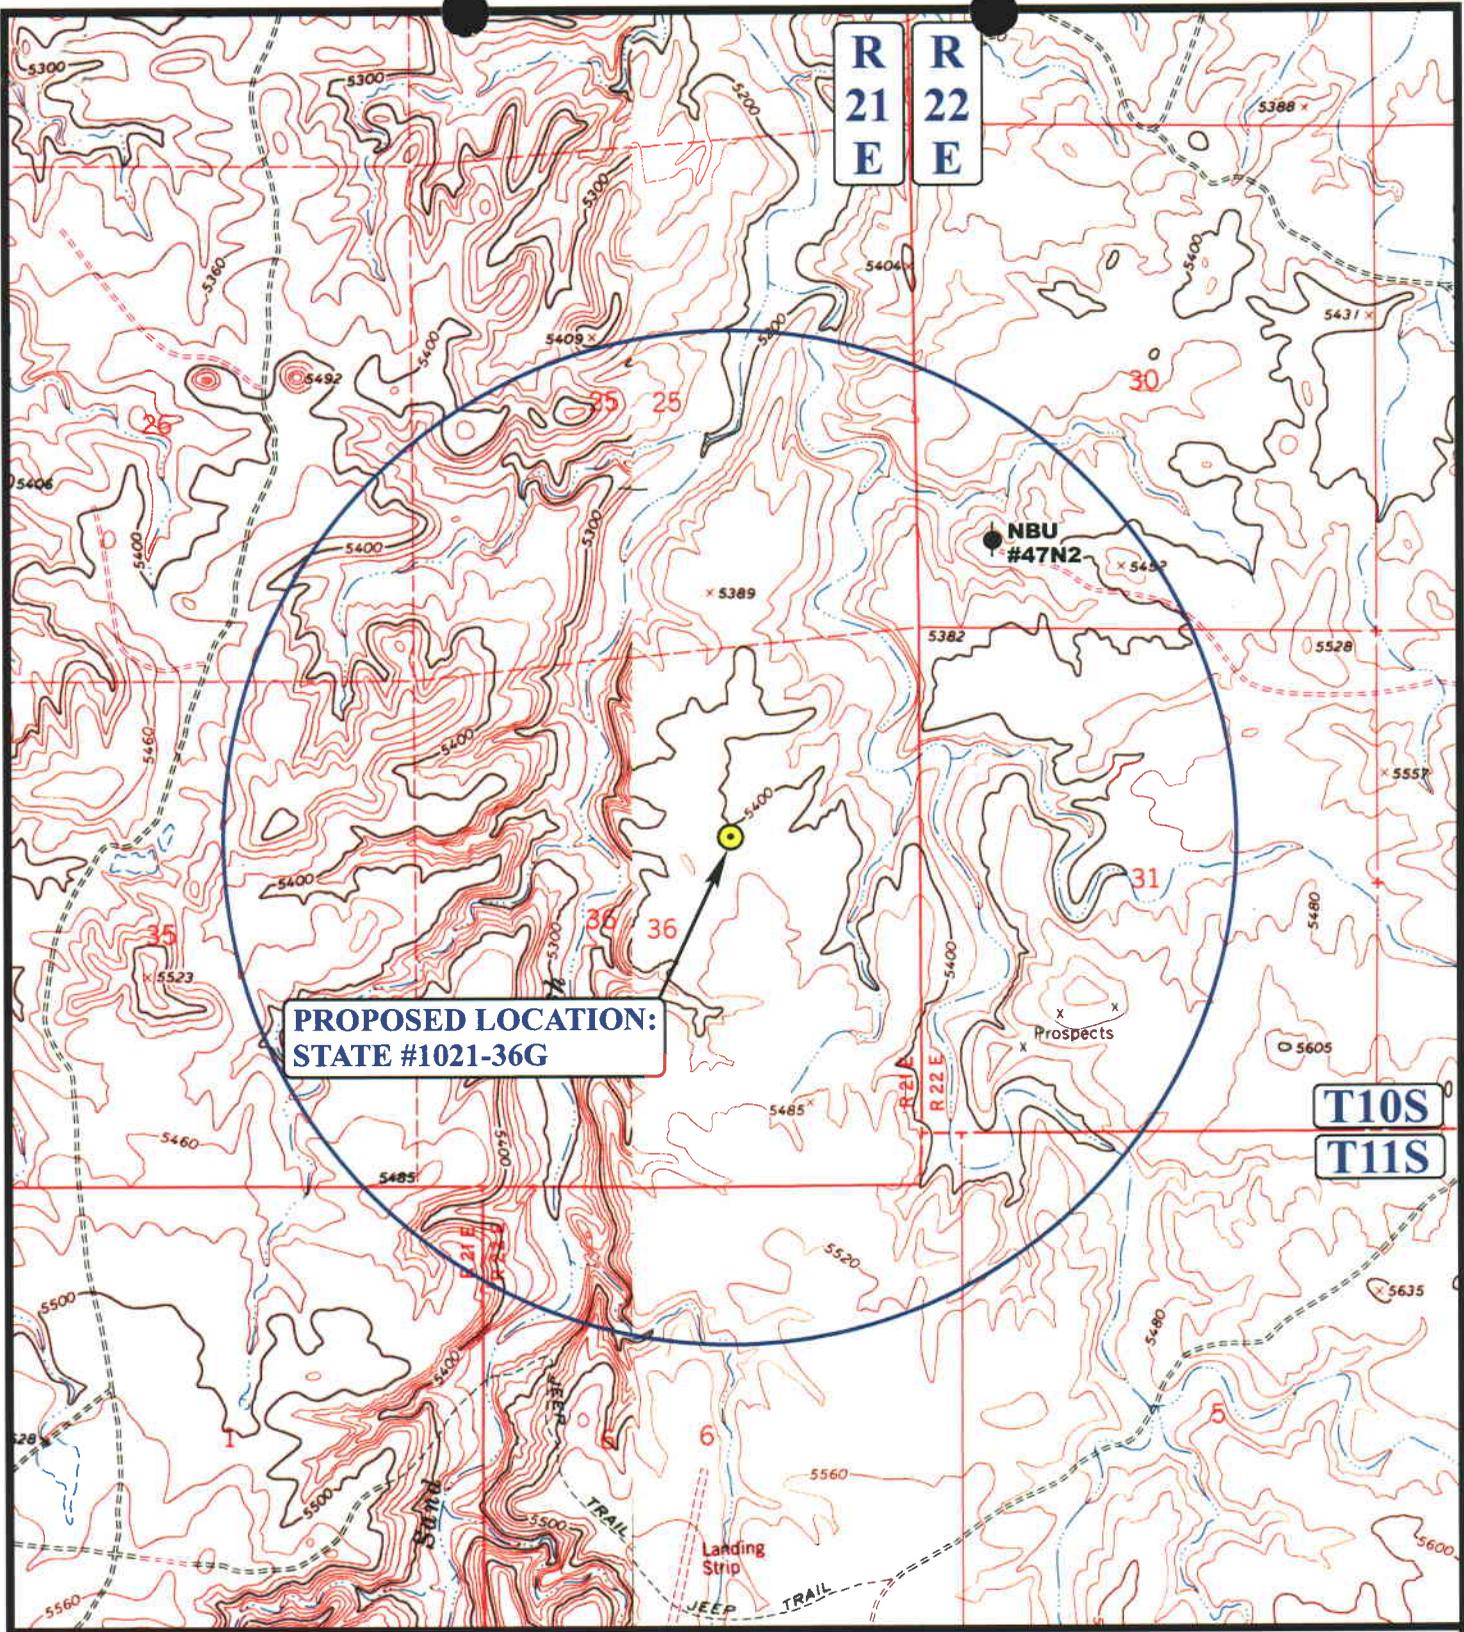

**PROPOSED LOCATION:  
STATE #1021-36G**

**LEGEND:**

- ⊘ DISPOSAL WELLS
- PRODUCING WELLS
- SHUT IN WELLS
- ⊘ WATER WELLS
- ABANDONED WELLS
- TEMPORARILY ABANDONED

**WESTPORT OIL AND GAS COMPANY, L.P.**

**STATE #1021-36G  
SECTION 36, T10S, R21E, S.L.B.&M.  
1953' FNL 1977' FEL**



**Uintah Engineering & Land Surveying**  
85 South 200 East Vernal, Utah 84078  
(435) 789-1017 \* FAX (435) 789-1813




**TOPOGRAPHIC  
MAP**

**12 13 04**  
MONTH DAY YEAR



SCALE: 1" = 2000' DRAWN BY: L.K. REVISED: 00-00-00

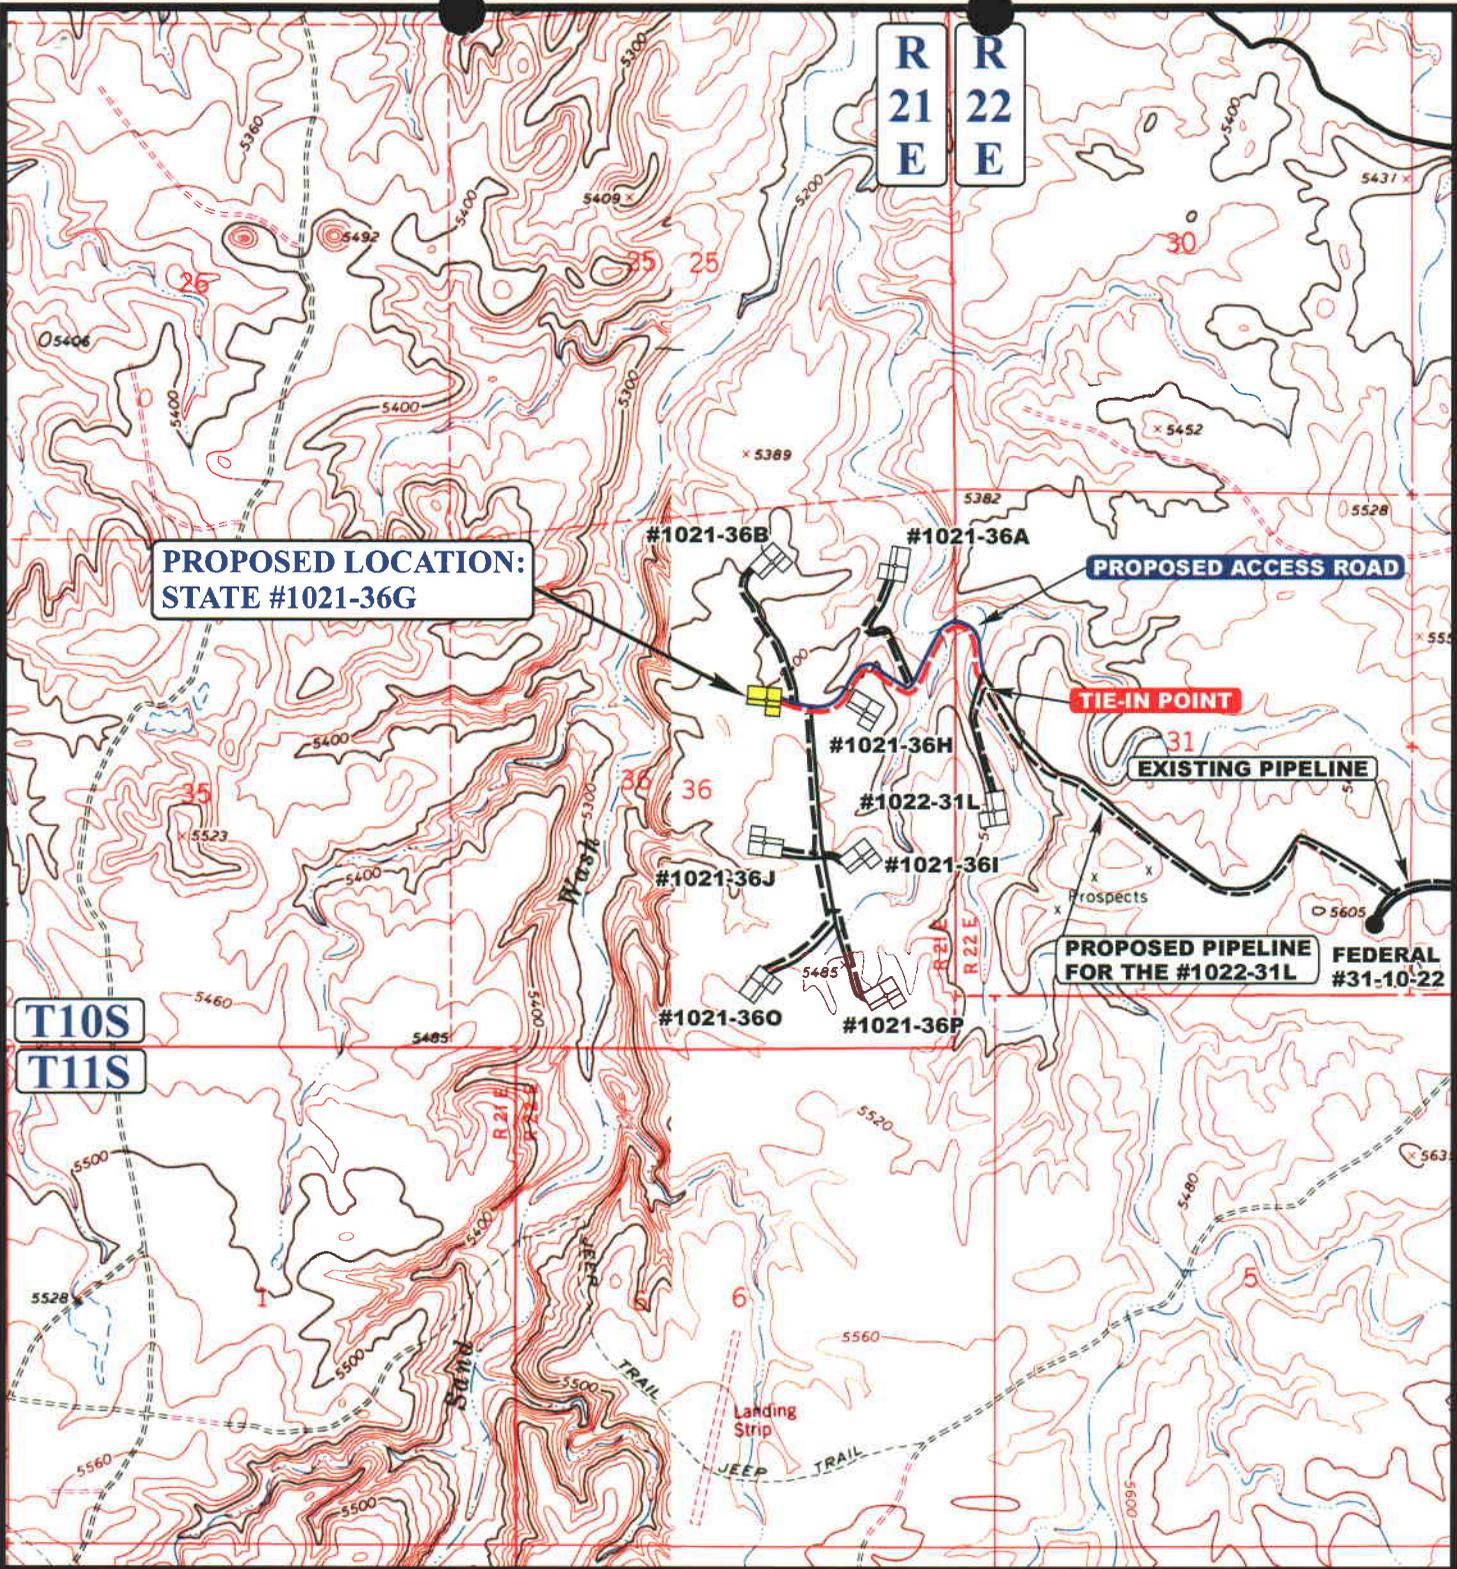

**PROPOSED LOCATION:  
STATE #1021-36G**

**PROPOSED ACCESS ROAD**

**TIE-IN POINT**

**EXISTING PIPELINE**

**PROPOSED PIPELINE FOR THE #1022-31L**  
FEDERAL #31-10-22

**T10S  
T11S**

**R 21 E  
R 22 E**

**APPROXIMATE TOTAL PIPELINE DISTANCE = 3280' +/-**

**LEGEND:**

- PROPOSED ACCESS ROAD
- EXISTING PIPELINE
- PROPOSED PIPELINE



**WESTPORT OIL AND GAS COMPANY, L.P.**

**STATE #1021-36G  
SECTION 36, T10S, R21E, S.L.B.&M.  
1953' FNL 1977' FEL**



**Uintah Engineering & Land Surveying**  
85 South 200 East Vernal, Utah 84078  
(435) 789-1017 \* FAX (435) 789-1813

**TOPOGRAPHIC MAP** **12 13 04**  
MONTH DAY YEAR

SCALE: 1" = 1000' DRAWN BY: L.K. REV: 03-11-05 L.K.



# WESTPORT OIL AND GAS COMPANY, L.P.

STATE #1021-36G

LOCATED IN UINTAH COUNTY, UTAH  
SECTION 36, T10S, R21E, S.L.B.&M.



PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: NORTHERLY



PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: NORTHWESTERLY



Uintah Engineering & Land Surveying  
85 South 200 East Vernal, Utah 84078  
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS

12 13 04  
MONTH DAY YEAR

PHOTO


TAKEN BY: A.F.

DRAWN BY: L.K.

REVISED: 00-00-00

LOCATION LAYOUT FOR


STATE #1021-36G  
SECTION 36, T10S, R21E, S.L.B.&M.  
1953' FNL 1977' FEL



SCALE: 1" = 50'  
DATE: 1-6-04  
Drawn By: K.G.

CONSTRUCT DIVERSION DITCH

NOTE:  
Flare Pit is to be located a min. of 100' from the Well Head.

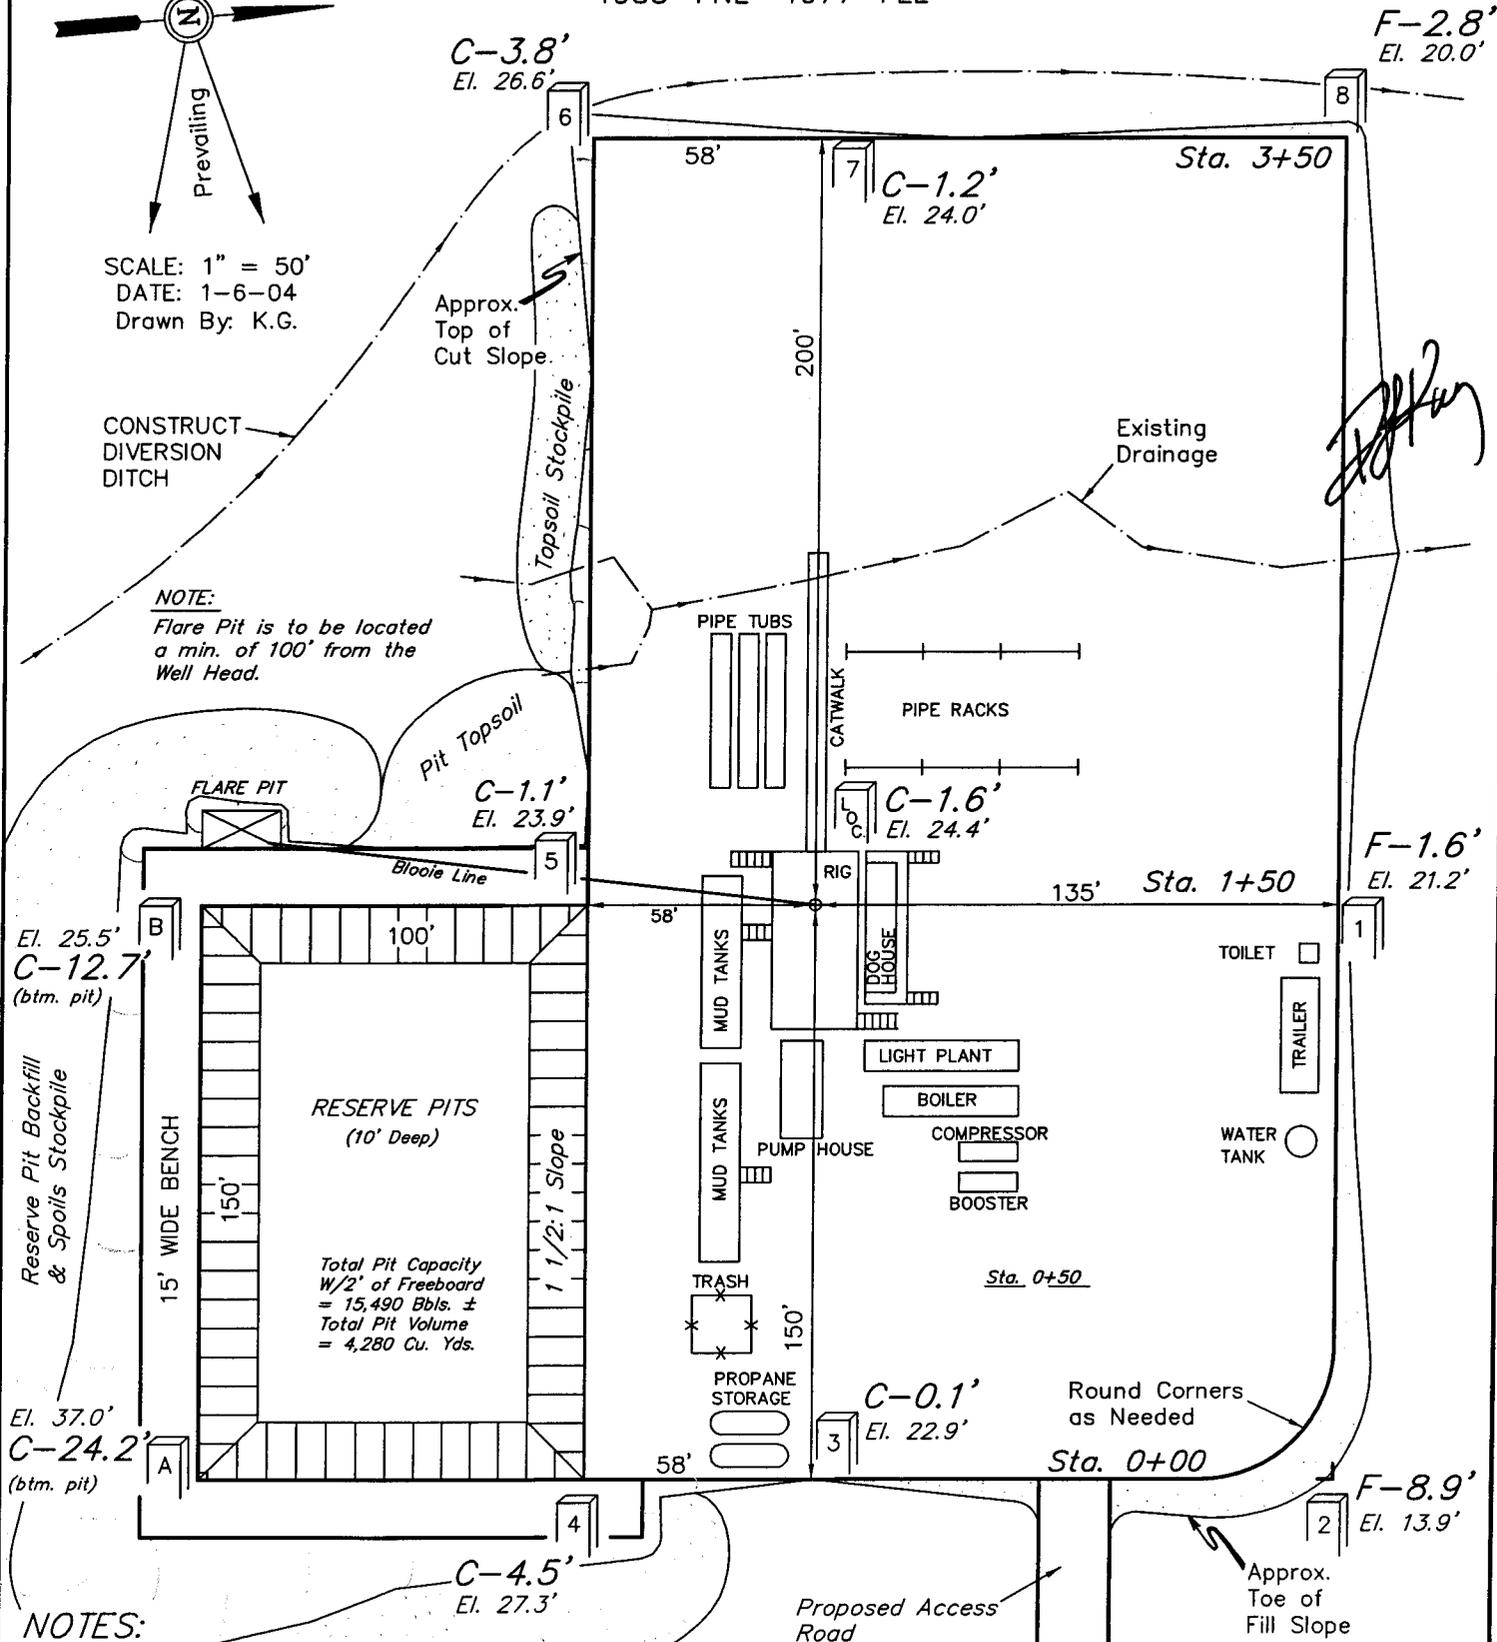

NOTES:

Elev. Ungraded Ground At Loc. Stake = 5424.4'  
FINISHED GRADE ELEV. AT LOC. STAKE = 5422.8'

WESTPORT OIL AND GAS COMPANY, L.P.


FIGURE #2

TYPICAL CROSS SECTIONS FOR

STATE #1021-36G  
SECTION 36, T10S, R21E, S.L.B.&M.  
1953' FNL 1977' FEL

1" = 20'  
X-Section Scale  
1" = 50'

DATE: 1-6-04  
Drawn By: K.G.

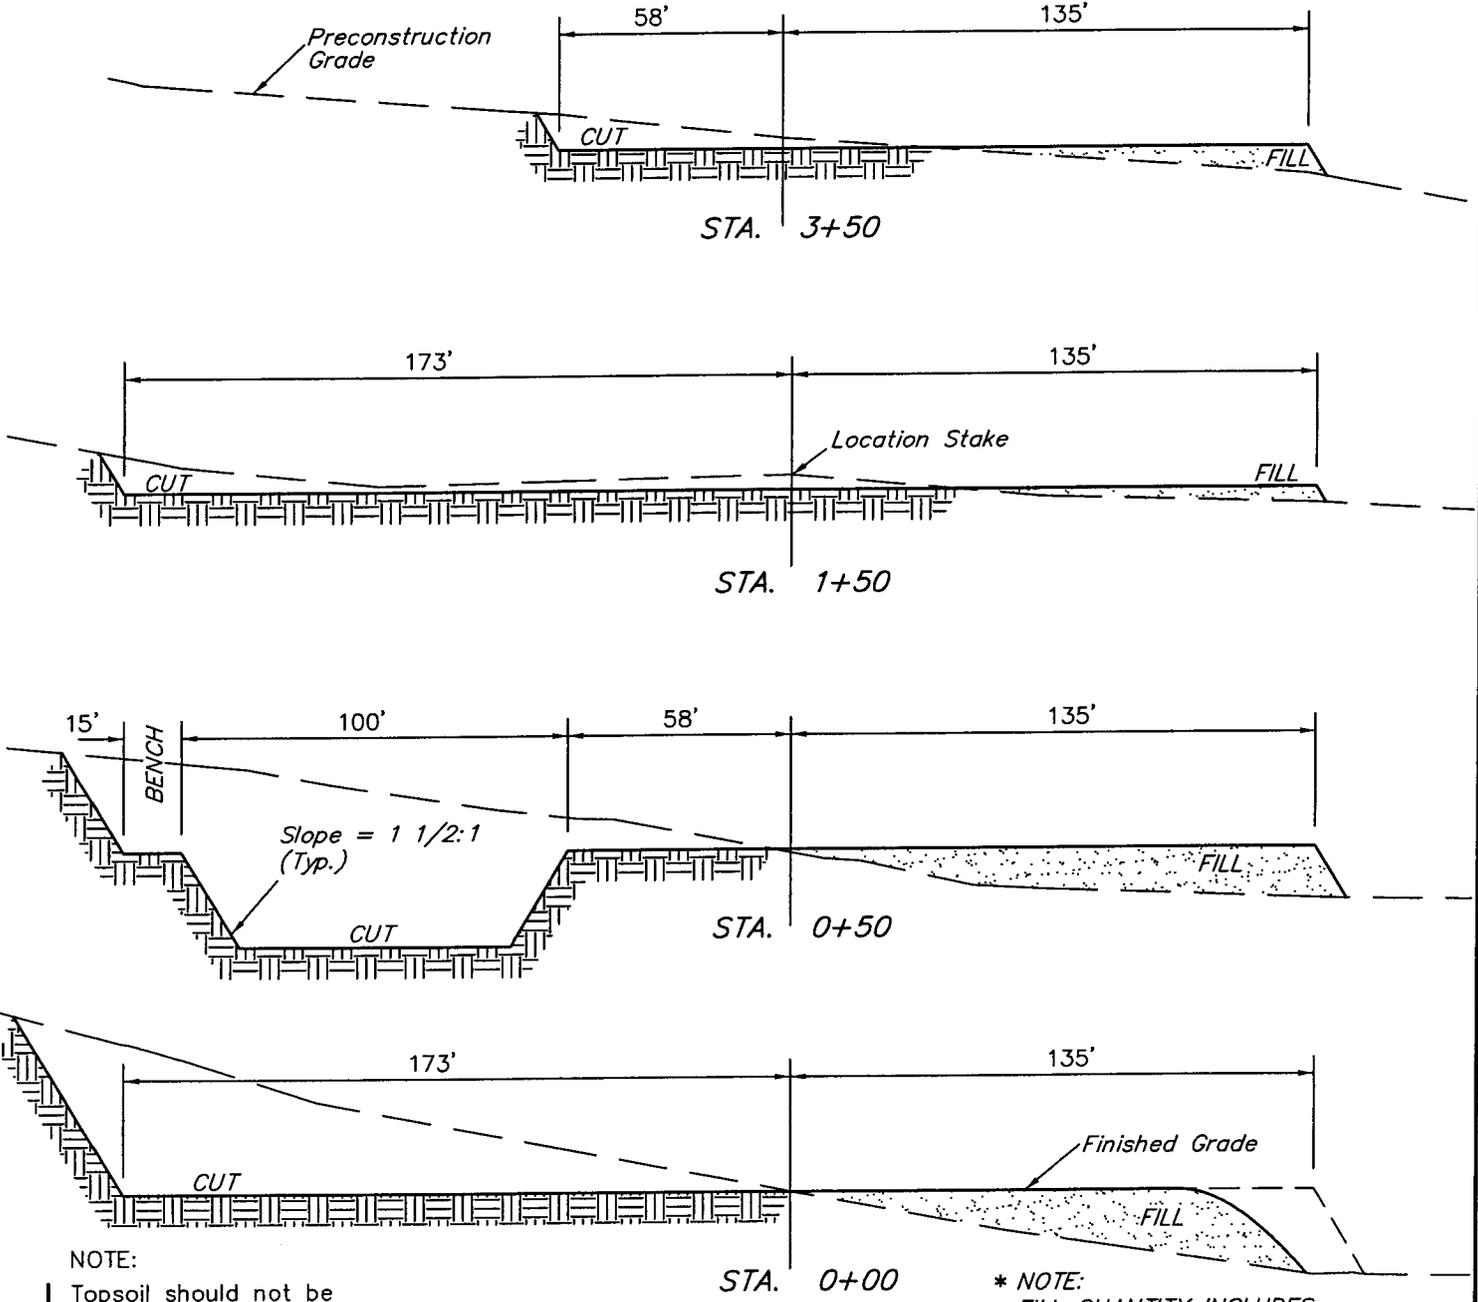

NOTE:  
Topsoil should not be Stripped Below Finished Grade on Substructure Area.

\* NOTE:  
FILL QUANTITY INCLUDES 5% FOR COMPACTION

APPROXIMATE YARDAGES

CUT	
(6") Topsoil Stripping	= 1,900 Cu. Yds.
Remaining Location	= 9,820 Cu. Yds.
<b>TOTAL CUT</b>	<b>= 11,720 CU.YDS.</b>
<b>FILL</b>	<b>= 7,680 CU.YDS.</b>

EXCESS MATERIAL	= 4,040 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 4,040 Cu. Yds.
EXCESS UNBALANCE (After Rehabilitation)	= 0 Cu. Yds.

WORKSHEET  
APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 03/18/2005

API NO. ASSIGNED: 43-047-36417

WELL NAME: STATE 1021-36G  
OPERATOR: WESTPORT OIL & GAS CO ( N2115 )  
CONTACT: DEBRA DOMENICI

PHONE NUMBER: 435-781-7060

PROPOSED LOCATION:

SWNE 36 100S 210E  
SURFACE: 1953 FNL 1977 FEL  
BOTTOM: 1953 FNL 1977 FEL  
UINTAH  
NATURAL BUTTES ( 630 )

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering	D&D	4/15/05
Geology		
Surface		

LEASE TYPE: 3 - State  
LEASE NUMBER: ML-47060  
SURFACE OWNER: 3 - State  
PROPOSED FORMATION: WSMVD  
COALBED METHANE WELL? NO

LATITUDE: 39.90600

LONGITUDE: -109.4962

RECEIVED AND/OR REVIEWED:

- Plat
- Bond: Fed[] Ind[] Sta[] Fee[]  
(No. RLB 0005236 )
- Potash (Y/N)
- Oil Shale 190-5 (B) or 190-3 or 190-13
- Water Permit  
(No. 43-8496 )
- RDCC Review (Y/N)  
(Date: \_\_\_\_\_ )
- Fee Surf Agreement (Y/N)

LOCATION AND SITING:


- R649-2-3.  
Unit \_\_\_\_\_
- R649-3-2. General  
Siting: 460 From Qtr/Qtr & 920' Between Wells
- R649-3-3. Exception
- Drilling Unit  
Board Cause No: \_\_\_\_\_  
Eff Date: \_\_\_\_\_  
Siting: \_\_\_\_\_
- R649-3-11. Directional Drill

COMMENTS:

Needs Preser (03-30-05)

STIPULATIONS:

- 1- Spacing Strip
- 2- OIL SHALE
- 3- STATEMENT OF BASIS

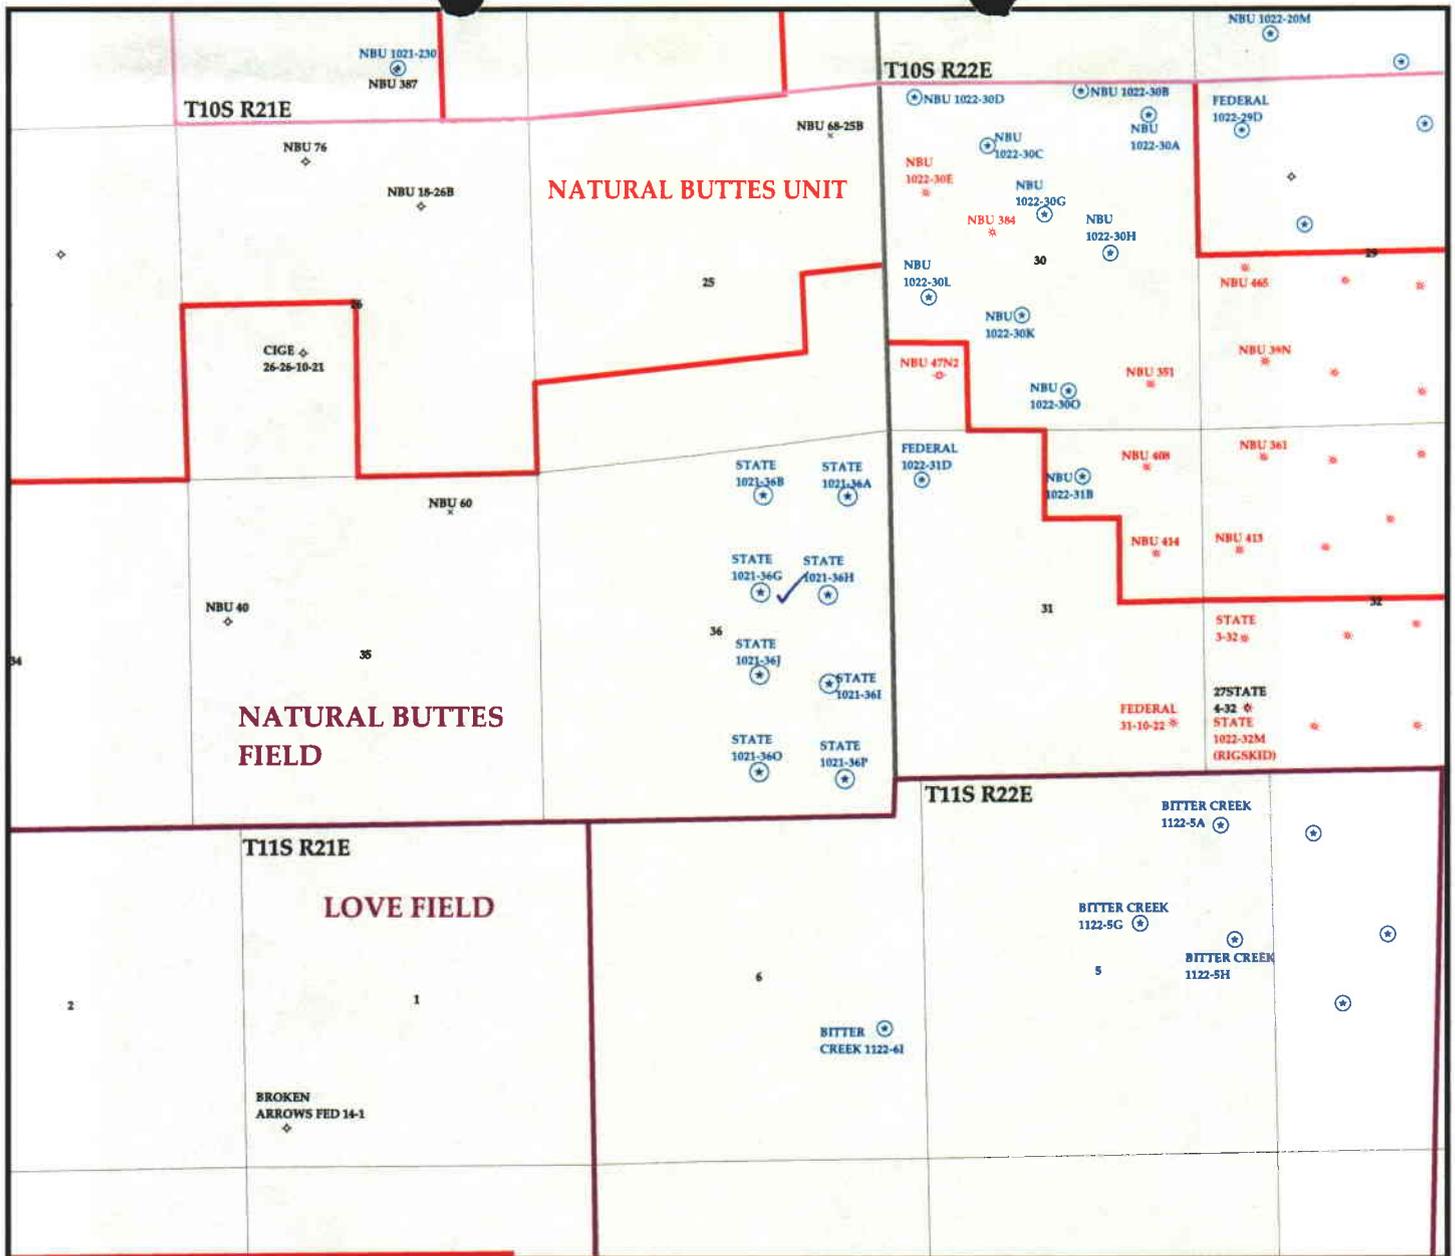

OPERATOR- WESTPORT O&G CO (N2115)


SEC. 36 T.10S R.21E

FIELD: NATURAL BUTTES (630)

COUNTY: UINTAH

SPACING: R649-3-2 / GENERAL SITING

Wells	Units.shp	Fields.shp
♣ GAS INJECTION	□ EXPLORATORY	□ ABANDONED
★ GAS STORAGE	□ GAS STORAGE	□ ACTIVE
× LOCATION ABANDONED	□ NF PP OIL	□ COMBINED
⊕ NEW LOCATION	□ NF SECONDARY	□ INACTIVE
◇ PLUGGED & ABANDONED	□ PENDING	□ PROPOSED
* PRODUCING GAS	□ PI OIL	□ STORAGE
● PRODUCING OIL	□ PP GAS	□ TERMINATED
⊕ SHUT-IN GAS	□ PP GEOTHERML	
⊕ SHUT-IN OIL	□ PP OIL	
× TEMP. ABANDONED	□ SECONDARY	
○ TEST WELL	□ TERMINATED	
▲ WATER INJECTION		
◆ WATER SUPPLY		
♣ WATER DISPOSAL		



Utah Oil Gas and Mining



PREPARED BY: DIANA WHITNEY  
DATE: 18-MARCH-2005

**DIVISION OF OIL, GAS AND MINING  
APPLICATION FOR PERMIT TO DRILL  
STATEMENT OF BASIS**

**OPERATOR:** WESTPORT OIL AND GAS COMPANY, L.P.  
**WELL NAME & NUMBER:** STATE 1021-36G  
**API NUMBER:** 43-047-36417  
**LOCATION:** 1/4,1/4 SW/NE Sec: 36 TWP: 10S RNG: 21E 1953' FNL 1977' FEL

**Geology/Ground Water:**

Westport proposes to set 1,800' of surface casing at this location. The depth to the base of the moderately saline water at this location is estimated to be at a depth of 3,400'. A search of Division of Water Rights records shows no water wells within a 10,000 foot radius of the center of Section 36. The surface formation at this site is the Uinta Formation. The Uinta Formation is made up of interbedded shales and sandstones. The sandstones are mostly lenticular and discontinuous and should not be a significant source of useable ground water.

**Reviewer:** Brad Hill **Date:** 04/04/05

**Surface:**

The predrill investigation of the surface was performed on 03/30/05. Floyd Bartlett with DWR and Ed Bonner with SITLA were invited to this investigation on 03/22/05. Ed Bonner from STILA did not attend. DWR had no significant concerns regarding the construction of this location or the drilling of the well. This site is on State surface, with State minerals, and appears to be the best site for a location in the immediate area. There are numerous sandstone outcroppings on the slopes below this site. Mr. Estes stated that they would be installing a 20 mil liner with a felt subliner in the reserve pit.

**Reviewer:** Brad Hill **Date:** 04/04/05

**Conditions of Approval/Application for Permit to Drill:**

1. A synthetic liner with a minimum thickness of 20 mils and a felt subliner shall be properly installed and maintained in the reserve pit.
2. The entire pad shall be bermed to prevent any fluids from leaving the location.
3. Reroute existing drainages around the location.

**ON-SITE PREDRILL EVALUATION**  
**Division of Oil, Gas and Mining**

OPERATOR: Westport Oil and Gas Company L.P.  
WELL NAME & NUMBER: State 1021-36G  
API NUMBER: 43-047-36417  
LEASE: ML-47060 FIELD/UNIT: Natural Buttes  
LOCATION: 1/4,1/4 SW/NE Sec: 36 TWP: 10S RNG: 21E 1953' FNL 1977' FEL  
LEGAL WELL SITING: 460 F SEC. LINE; 460 F 1/4,1/4 LINE; 920 F ANOTHER WELL.  
GPS COORD (UTM): \_\_\_\_\_ SURFACE OWNER: STATE OF UTAH

**PARTICIPANTS**

Brad Hill (DOGM), Floyd Bartlett (DWR), Clay Einerson, Carroll Estes, (WESTPORT), David Kay (UELS).

**REGIONAL/LOCAL SETTING & TOPOGRAPHY**

Site is on a flat area in a saddle between hills with a slight slope to the NE. There is a small NE drainage that crosses the location from SW to NE.

**SURFACE USE PLAN**

CURRENT SURFACE USE: Wildlife and livestock grazing, hunting.

PROPOSED SURFACE DISTURBANCE: Location will be 350' by 293'. Access road will require 1.7 miles of new construction. 1.1 miles of this road will be common with other proposed wells in this section.

LOCATION OF EXISTING WELLS WITHIN A 1 MILE RADIUS: See map included in well file.

LOCATION OF PRODUCTION FACILITIES AND PIPELINES: All production facilities will be on location and added after the well is drilled. Proposed pipeline will follow the access road and connect to an existing line in Section 31.

SOURCE OF CONSTRUCTION MATERIAL: All construction material will be Borrowed from site during construction of location.

ANCILLARY FACILITIES: None will be required.

WILL DRILLING AT THIS LOCATION GENERATE PUBLIC INTEREST OR CONCERNS?  
(EXPLAIN): No

**WASTE MANAGEMENT PLAN:**

Drilled cuttings will be settled into reserve pit. Liquids from pit will be allowed to evaporate. Formation water will be confined to storage tanks. Sewage facilities, storage and disposal will be handled by commercial contractor. Trash will be contained in trash baskets and hauled to an approved landfill.

**ENVIRONMENTAL PARAMETERS**

AFFECTED FLOODPLAINS AND/OR WETLANDS: None

FLORA/FAUNA: Sage, Prickly pear, Barrel cactus, Shadscale, Vetch, Sparse grasses: Pronghorn, Rodents, Songbirds, Raptors, Coyote, Rabbits, Deer.

SOIL TYPE AND CHARACTERISTICS: Light brown silty clay with abundant rock fragments.

SURFACE FORMATION & CHARACTERISTICS: Uinta Formation and Quaternary Alluvium derived from the Uinta Formation.

EROSION/SEDIMENTATION/STABILITY: Very little natural erosion. Sedimentation and stability are not a problem and location construction shouldn't cause an increase in stability or erosion problems.

PALEONTOLOGICAL POTENTIAL: None observed.

**RESERVE PIT**

CHARACTERISTICS: 150' BY 100' and 10' deep. The pit will be placed in cut on the uphill side of the well pad.

LINER REQUIREMENTS (Site Ranking Form attached): A 20 mil liner and felt subliner will be installed in the reserve pit.

**SURFACE RESTORATION/RECLAMATION PLAN**

As per SITLA.

SURFACE AGREEMENT: As per SITLA.

CULTURAL RESOURCES/ARCHAEOLOGY: Site has been inspected by Montgomery Archeological Consultants. A report of this investigation will be placed on file.

**OTHER OBSERVATIONS/COMMENTS**

This predrill investigation was conducted on a cool sunny day.

**ATTACHMENTS**

Photos of this site were taken and will be placed on file.

Brad Hill  
DOGM REPRESENTATIVE

03-30-05, 11:30 AM  
DATE/TIME

**Evaluation Ranking Criteria and Ranking Scale  
For Reserve and Onsite Pit Liner Requirements**

<u>Site-Specific Factors</u>	<u>Ranking</u>	<u>Site Ranking</u>
Distance to Groundwater (feet)		
>200	0	
100 to 200	5	
75 to 100	10	
25 to 75	15	
<25 or recharge area	20	<u>5</u>
Distance to Surf. Water (feet)		
>1000	0	
300 to 1000	2	
200 to 300	10	
100 to 200	15	
< 100	20	<u>15</u>
Distance to Nearest Municipal Well (feet)		
>5280	0	
1320 to 5280	5	
500 to 1320	10	
<500	20	<u>0</u>
Distance to Other Wells (feet)		
>1320	0	
300 to 1320	10	
<300	20	<u>0</u>
Native Soil Type		
Low permeability	0	
Mod. permeability	10	
High permeability	20	<u>15</u>
Fluid Type		
Air/mist	0	
Fresh Water	5	
TDS >5000 and <10000	10	
TDS >10000 or Oil Base Mud Fluid	15	
containing significant levels of hazardous constituents	20	<u>5</u>
Drill Cuttings		
Normal Rock	0	
Salt or detrimental	10	<u>0</u>
Annual Precipitation (inches)		
<10	0	
10 to 20	5	
>20	10	<u>5</u>
Affected Populations		
<10	0	
10 to 30	6	
30 to 50	8	
>50	10	<u>0</u>
Presence of Nearby Utility Conduits		
Not Present	0	
Unknown	10	
Present	15	<u>0</u>

**Final Score**      45      (Level I Sensitivity)

Sensitivity Level I = 20 or more; total containment is required.  
Sensitivity Level II = 15-19; lining is discretionary.  
Sensitivity Level III = below 15; no specific lining is required.










04-05 Westport State 1021-G  
Casing Schematic

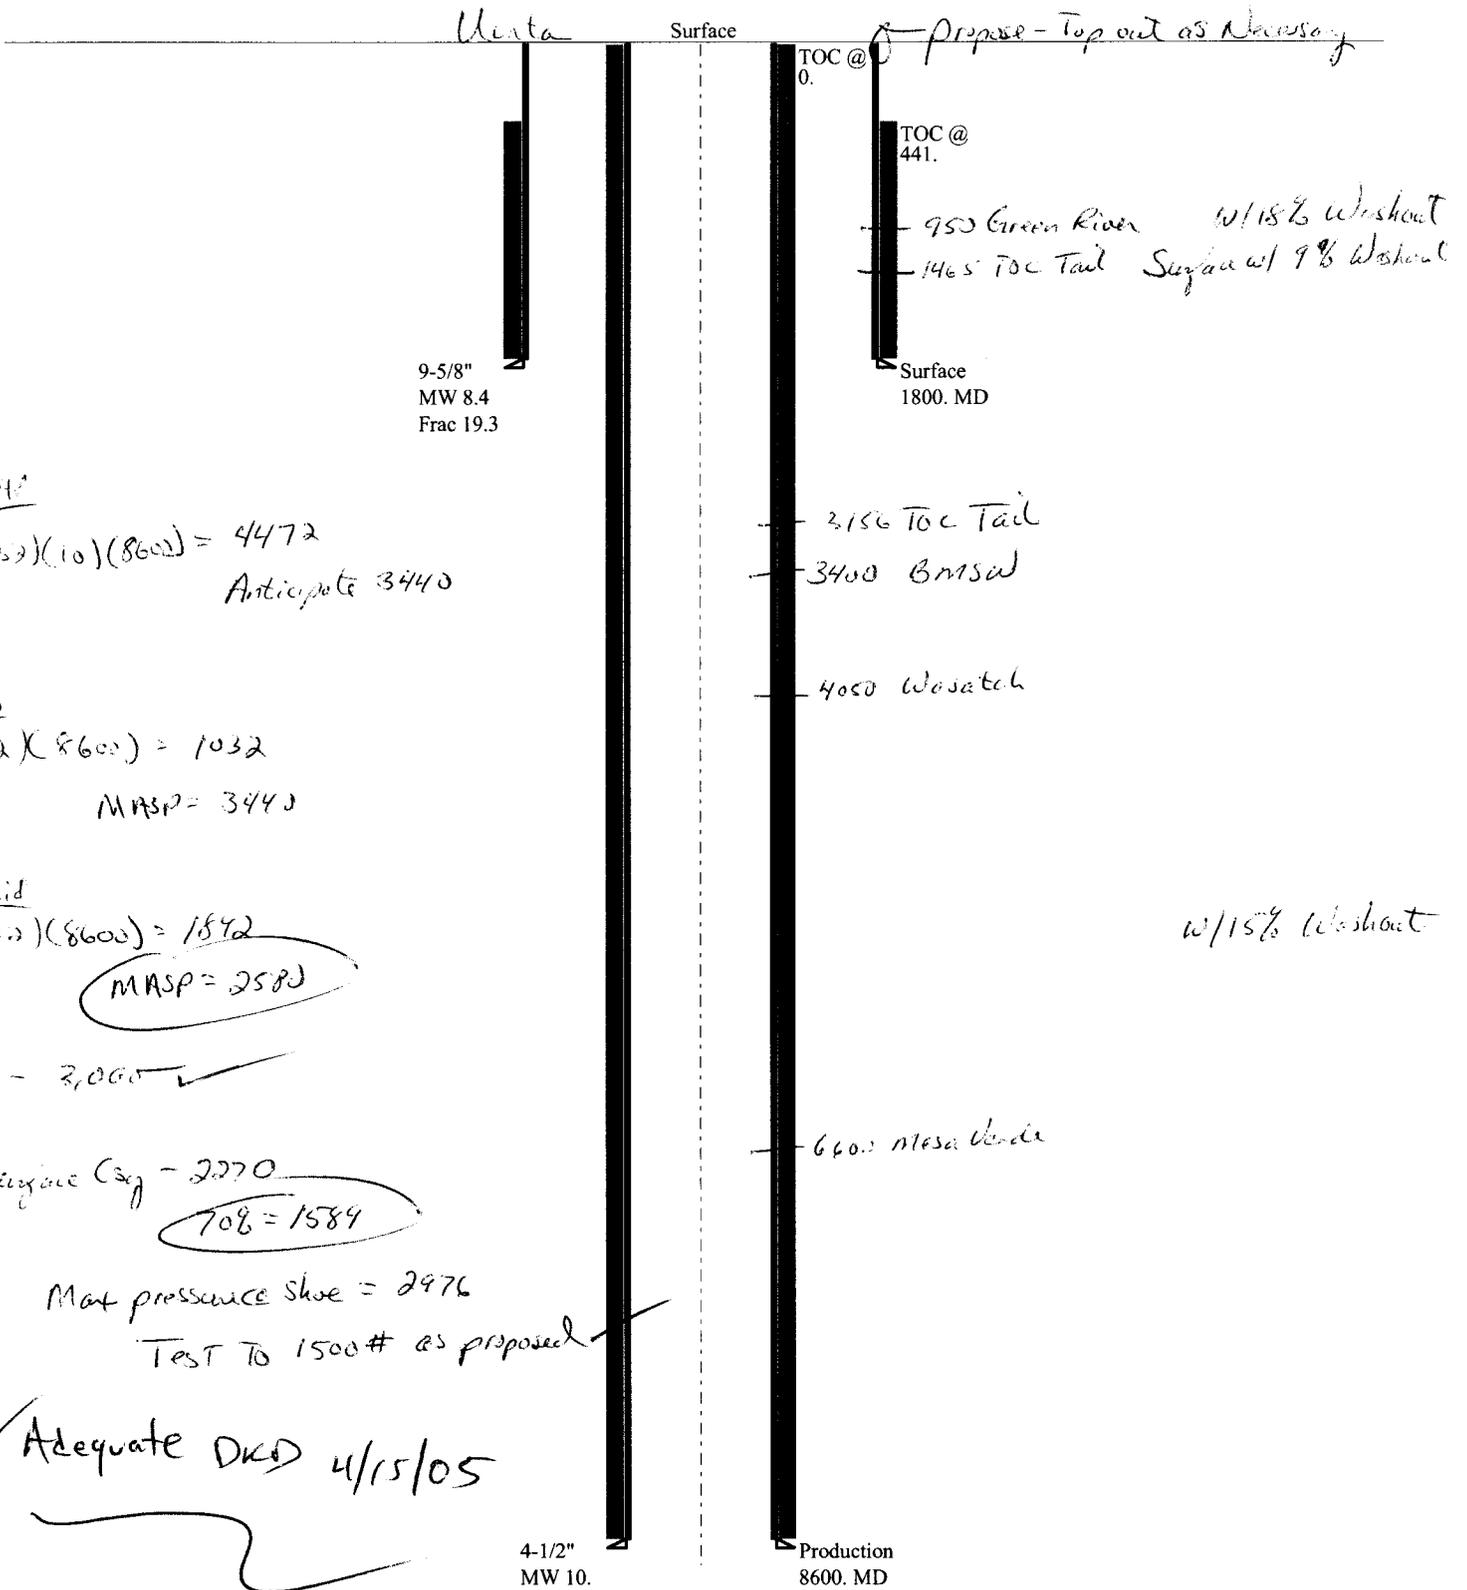

Well name:	<b>04-05 Westport State 1021-36G</b>		
Operator:	<b>Westport Oil &amp; Gas</b>		Project ID:
String type:	Surface		43-047-36417
Location:	Uintah County		

**Design parameters:**

**Collapse**

Mud weight: 8.400 ppg  
 Design is based on evacuated pipe.

**Burst**

Max anticipated surface pressure: 1,584 psi  
 Internal gradient: 0.120 psi/ft  
 Calculated BHP: 1,800 psi  
  
 No backup mud specified.

**Minimum design factors:**

**Collapse:**

Design factor 1.125

**Burst:**

Design factor 1.00

**Tension:**

8 Round STC: 1.80 (J)  
 8 Round LTC: 1.80 (J)  
 Buttress: 1.60 (J)  
 Premium: 1.50 (J)  
 Body yield: 1.50 (B)

Tension is based on buoyed weight.  
 Neutral point: 1,578 ft

**Environment:**

H2S considered? No  
 Surface temperature: 75 °F  
 Bottom hole temperature: 100 °F  
 Temperature gradient: 1.40 °F/100ft  
 Minimum section length: 1,500 ft

Cement top: 441 ft

Non-directional string.

**Re subsequent strings:**

Next setting depth: 8,600 ft  
 Next mud weight: 10.000 ppg  
 Next setting BHP: 4,468 psi  
 Fracture mud wt: 19.250 ppg  
 Fracture depth: 1,800 ft  
 Injection pressure: 1,800 psi

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Internal Capacity (ft <sup>3</sup> )
1	1800	9.625	32.30	H-40	ST&C	1800	1800	8.876	114.1

Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	785	1370	1.745	1800	2270	1.26	51	254	4.98 J

Prepared by: Clinton Dworshak  
 Utah Div. of Oil & Mining

Phone: 801-538-5280  
 FAX: 801-359-3940

Date: April 5, 2005  
 Salt Lake City, Utah

Remarks:

Collapse is based on a vertical depth of 1800 ft, a mud weight of 8.4 ppg. The casing is considered to be evacuated for collapse purposes. Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

Well name:

**04-05 Westport State 1021-36G**

Operator: **Westport Oil & Gas**

String type: Production

Project ID:

43-047-36417

Location: Uintah County

**Design parameters:**

**Collapse**

Mud weight: 10.000 ppg  
Design is based on evacuated pipe.

**Minimum design factors:**

**Collapse:**

Design factor 1.125

**Environment:**

H2S considered? No  
Surface temperature: 75 °F  
Bottom hole temperature: 195 °F  
Temperature gradient: 1.40 °F/100ft  
Minimum section length: 1,500 ft

**Burst:**

Design factor 1.00

Cement top: Surface

**Burst**

Max anticipated surface pressure: 3,435 psi  
Internal gradient: 0.120 psi/ft  
Calculated BHP 4,467 psi

No backup mud specified.

**Tension:**

8 Round STC: 1.80 (J)  
8 Round LTC: 1.80 (J)  
Buttress: 1.60 (J)  
Premium: 1.50 (J)  
Body yield: 1.50 (B)

Non-directional string.

Tension is based on buoyed weight.  
Neutral point: 7,314 ft

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Internal Capacity (ft³)
1	8600	4.5	11.60	N-80	LT&C	8600	8600	3.875	199.3
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	4467	6350	1.421	4467	7780	1.74	85	223	2.63 J

Prepared by: Clinton Dworshak  
Utah Div. of Oil & Mining

Phone: 801-538-5280  
FAX: 801-359-3940

Date: April 5, 2005  
Salt Lake City, Utah

**Remarks:**

Collapse is based on a vertical depth of 8600 ft, a mud weight of 10 ppg. The casing is considered to be evacuated for collapse purposes. Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

*Engineering responsibility for use of this design will be that of the purchaser.*



**State of Utah**

**Department of  
Natural Resources**

MICHAEL R. STYLER  
*Executive Director*

**Division of  
Oil, Gas & Mining**

MARY ANN WRIGHT  
*Acting Division Director*

JON M. HUNTSMAN, JR.  
*Governor*

GARY R. HERBERT  
*Lieutenant Governor*

April 18, 2005

Westport Oil & Gas Company, LP  
1368 South 1200 East  
Vernal, Utah 84078

Re: State 1021-36G Well, 1953' FNL, 1977' FEL, SW NE, Sec. 36, T. 10 South,  
R. 21 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-36417.

Sincerely,



John R. Baza  
Associate Director

jc  
Enclosures

cc: Uintah County Assessor  
SITLA

**Operator:** Westport Oil & Gas Company, LP  
**Well Name & Number** State 1021-36G  
**API Number:** 43-047-36417  
**Lease:** ML-47060

**Location:** SW NE                      **Sec.** 36                      **T.** 10 South                      **R.** 21 East

### Conditions of Approval

**1. General**

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for Permit to Drill.

**2. Notification Requirements**

The operator is required to notify the Division of Oil, Gas and Mining of the following actions during drilling of this well:

- 24 hours prior to cementing or testing casing
- 24 hours prior to testing blowout prevention equipment
- 24 hours prior to spudding the well
- within 24 hours of any emergency changes made to the approved drilling program
- prior to commencing operations to plug and abandon the well

The following are Division of Oil, Gas and Mining contacts and their work telephone numbers (please leave a voice mail message if the person is not available to take the call):

- Dan Jarvis at (801) 538-5338
- Carol Daniels at (801) 538-5284 (spud)

**3. Reporting Requirements**

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. Compliance with the State of Utah Antiquities Act forbids disturbance of archeological, historical, or paleontological remains. Should archeological, historical or paleontological remains be encountered during your operations, you are required to immediately suspend all operations and immediately inform the Trust Lands Administration and the Division of State History of the discovery of such remains.

5. Compliance with the Conditions of Approval/Application for Permit to Drill outlined in the Statement of Basis. (Copy Attached)

6. In accordance with Order in Cause No. 190-5(b) dated October 28, 1982, the Operator shall comply with requirements of Rules R649-3-31 and R649-3-27 pertaining to Designated Oil Shale Areas. Additionally, the operator shall ensure that the surface and/or production casing is properly cemented over the entire oil shale interval as defined by Rule R649-3-31. The Operator shall report the actual depth the oil shale is encountered to the Division.

Page 2

API # 43-047-36417

April 18, 2005

7. This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.

# DIVISION OF OIL, GAS AND MINING

## **SPUDDING INFORMATION**

Name of Company: WESTPORT OIL & GAS COMPANY LP

Well Name: STATE 1021-36G

Api No: 43-047-36417 Lease Type: STATE

Section 36 Township 10S Range 21E County UINTAH

Drilling Contractor PETE MARTIN'S RIG # BUCKET

### **SPUDDED:**

Date 04/05/06

Time 8:00 AM

How DRY

**Drilling will Commence:** \_\_\_\_\_

Reported by LOU WELDON

Telephone # (435) 828-7035

Date 04/05/2006 Signed CHD

**STATE OF UTAH**  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

FORM 6

**ENTITY ACTION FORM**

Operator: WESTPORT OIL & GAS COMPANY L.P. Operator Account Number: N 2115  
Address: 1368 SOUTH 1200 EAST  
city VERNAL  
state UT zip 84078 Phone Number: (435) 781-7024

**Well 1**

API Number	Well Name		QQ	Sec	Twp	Rng	County
4304736157	NBU 1022-16D		NWNW	16	10S	22E	UINTAH
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date		
<i>B</i>	99999	<i>2900</i>	4/5/2006		4/6/06		
<b>Comments:</b> MIRU PETE MARTIN BUCKET RIG. <i>WSTMVD</i> SPUD WELL LOCATION ON 04/05/2006 AT 1100 HRS. <span style="float:right"><i>-K</i></span>							

**Well 2**

API Number	Well Name		QQ	Sec	Twp	Rng	County
4304735982	NBU 921-14M		SWSW	14	9S	21E	UINTAH
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date		
<i>B</i>	99999	<i>2900</i>	4/5/2006		4/6/06		
<b>Comments:</b> MIRU PETE MARTIN BUCKET RIG. <i>WSTMVD</i> SPUD WELL LOCATION ON 04/05/2006 AT 1300 HRS. <span style="float:right"><i>-K</i></span>							

**Well 3**

API Number	Well Name		QQ	Sec	Twp	Rng	County
4304736417	STATE 1021-36G		SWNE	36	10S	21E	UINTAH
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date		
<i>A</i>	99999	<i>15297</i>	4/5/2006		4/6/06		
<b>Comments:</b> MIRU PETE MARTIN BUCKET RIG. <i>WSTMVD</i> SPUD WELL LOCATION ON 04/05/2006 AT 0800 HRS. <span style="float:right"><i>-K</i></span>							

**ACTION CODES:**

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (Explain in 'comments' section)

To *Farlane Russell* From *Sheila Upchego*  
(6/2000) Co./Dept. *0420617* *Oil & Gas Div*  
Phone # *(901) 538-5336* Phone # *(435) 781-7024*  
Fax # *(901) 359-3940* Fax # *(435) 781-7024*

SHEILA UPCHEGO

Name (Please Print)

Signature

REGULATORY ANALYST

4/6/2006

Title

Date

RECEIVED

APR 06 2006

DIV. OF OIL, GAS &amp; MINING

**STATE OF UTAH**  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

FORM 9

5. LEASE DESIGNATION AND SERIAL NUMBER:  
**ML-47060**

**SUNDRY NOTICES AND REPORTS ON WELLS**

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

7. UNIT or CA AGREEMENT NAME:

1. TYPE OF WELL      OIL WELL       GAS WELL       OTHER \_\_\_\_\_

8. WELL NAME and NUMBER:  
**STATE 1021-36G**

2. NAME OF OPERATOR:  
**WESTPORT OIL & GAS COMPANY L.P.**

9. API NUMBER:  
**4304736417**

3. ADDRESS OF OPERATOR:  
**1368 S. 1200 E.      CITY VERNAL      STATE UT      ZIP 84078**

PHONE NUMBER:  
**(435) 781-7024**

10. FIELD AND POOL, OR WILDCAT:  
**NATURAL BUTTES**

4. LOCATION OF WELL  
FOOTAGES AT SURFACE: **1953'FNL, 1977'FEL**  
  
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: **SWNE 36 10S 21E**

COUNTY: **UINTAH**  
  
STATE: **UTAH**

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA


TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate)  Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
<input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only)  Date of work completion: _____	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <b>WELL SPUD</b>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

**MIRU PETE MARTIN BUCKET RIG. DRILLED 20" CONDUCTOR HOLE TO 40'. RAN 14" 36.7# SCHEDULE 10 PIPE. CMT W/28 SX READY MIX.**

**SPUD WELL LOCATION ON 04/05/2006 AT 0800 HRS.**

NAME (PLEASE PRINT) **SHEILA UPCHEGO**      TITLE **REGULATORY ANALYST**

SIGNATURE       DATE **4/5/2006**

(This space for State use only)

**RECEIVED**  
**APR 12 2006**  
DIV. OF OIL, GAS & MINING

Division of Oil, Gas and Mining  
**OPERATOR CHANGE WORKSHEET**

**ROUTING**

1. DJJ
2. CDW

**X Change of Operator (Well Sold)**

Operator Name Change/Merger

The operator of the well(s) listed below has changed, effective:

**1/6/2006**

<b>FROM:</b> (Old Operator): N2115-Westport Oil & Gas Co., LP 1368 South 1200 East Vernal, UT 84078 Phone: 1-(435) 781-7024	<b>TO:</b> ( New Operator): N2995-Kerr-McGee Oil & Gas Onshore, LP 1368 South 1200 East Vernal, UT 84078 Phone: 1-(435) 781-7024
---	--

**CA No.**

**Unit:**

WELL NAME	SEC	TWN	RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
-----------	-----	-----	-----	--------	-----------	------------	-----------	-------------

**OPERATOR CHANGES DOCUMENTATION**

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 5/10/2006
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 5/10/2006
- The new company was checked on the **Department of Commerce, Division of Corporations Database** on: 3/7/2006
- a. Is the new operator registered in the State of Utah: YES Business Number: 1355743-0181
- b. If **NO**, the operator was contacted on:
- 5a. (R649-9-2)Waste Management Plan has been received on: IN PLACE
- 5b. Inspections of LA PA state/fee well sites complete on: n/a
- 5c. Reports current for Production/Disposition & Sundries on: ok
- Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM 3/27/2006 BIA not yet

**7. Federal and Indian Units:**

The BLM or BIA has approved the successor of unit operator for wells listed on: 3/27/2006

**8. Federal and Indian Communization Agreements ("CA"):**

The BLM or BIA has approved the operator for all wells listed within a CA on: n/a

**9. Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on:

**DATA ENTRY:**

- Changes entered in the **Oil and Gas Database** on: 5/15/2006
- Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 5/15/2006
- Bond information entered in RBDMS on: 5/15/2006
- Fee/State wells attached to bond in RBDMS on: 5/16/2006
- Injection Projects to new operator in RBDMS on: \_\_\_\_\_
- Receipt of Acceptance of Drilling Procedures for APD/New on: n/a Name Change Only

**BOND VERIFICATION:**

- Federal well(s) covered by Bond Number: CO1203
- Indian well(s) covered by Bond Number: RLB0005239
- (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond Number RLB0005236
- a. The **FORMER** operator has requested a release of liability from their bond on: n/a rider added KMG  
The Division sent response by letter on: \_\_\_\_\_

**LEASE INTEREST OWNER NOTIFICATION:**

- (R649-2-10) The **FORMER** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: 5/16/2006

**COMMENTS:**

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0135  
Expires November 30, 2000

**SUNDRY NOTICES AND REPORTS ON WELLS**  
*Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.*

5. Lease Serial No.  
**MULTIPLE LEASES**

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.  
**MUTIPLE WELLS**

9. API Well No.

10. Field and Pool, or Exploratory Area

11. County or Parish, State  
**UINTAH COUNTY, UTAH**

**SUBMIT IN TRIPLICATE - Other instructions on reverse side**

1. Type of Well  
 Oil Well  Gas Well  Other

2. Name of Operator  
**KERR-McGEE OIL & GAS ONSHORE LP**

3a. Address  
**1368 SOUTH 1200 EAST VERNAL, UT 84078**

3b. Phone No. (include area code)  
**(435) 781-7024**

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
**SEE ATTACHED**

**12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal
			<input type="checkbox"/> Water Shut-Off
			<input type="checkbox"/> Well Integrity
			<input checked="" type="checkbox"/> Other <b>CHANGE OF OPERATOR</b>

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

PLEASE BE ADVISED THAT KERR-McGEE OIL & GAS ONSHORE LP, IS CONSIDERED TO BE THE OPERATOR OF THE ATTACHED WELL LOCATIONS. EFFECTIVE JANUARY 6, 2006.  
KERR-McGEE OIL & GAS ONSHORE LP, IS RESPONSIBLE UNDER TERMS AND CONDITIONS OF THE LEASE(S) FOR THE OPERATIONS CONDUCTED UPON LEASE LANDS. BOND COVERAGE IS PROVIDED BY STATE OF UTAH NATIONWIDE BOND NO. RLB0005237.

**RECEIVED**

**MAY 10 2006**

DIV. OF OIL, GAS & MINING

**BLM BOND = C01203**  
**BIA BOND = RLB0005239**

**APPROVED 5/16/06**

*Earlene Russell*  
**Division of Oil, Gas and Mining**  
**Earlene Russell, Engineering Technician**

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) <b>RANDY BAYNE</b>	Title <b>DRILLING MANAGER</b>
Signature <i>Randy Bayne</i>	Date <b>May 9, 2006</b>

**THIS SPACE FOR FEDERAL OR STATE USE**

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0135  
Expires November 30, 2000

**SUNDRY NOTICES AND REPORTS ON WELLS**  
*Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.*

5. Lease Serial No.  
**MULTIPLE LEASES**

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

**SUBMIT IN TRIPLICATE - Other instructions on reverse side**

1. Type of Well  
 Oil Well  Gas Well  Other

8. Well Name and No.

**MUTIPLE WELLS**

2. Name of Operator

**WESTPORT OIL & GAS COMPANY L.P.**

9. API Well No.

3a. Address

**1368 SOUTH 1200 EAST VERNAL, UT 84078**

3b. Phone No. (include area code)

**(435) 781-7024**

10. Field and Pool, or Exploratory Area

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

**SEE ATTACHED**

11. County or Parish, State

**UINTAH COUNTY, UTAH**

**12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other CHANGE OF OPERATOR
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

EFFECTIVE JANUARY 6, 2006, WESTPORT OIL & GAS COMPANY L.P., HAS RELINQUISHED THE OPERATORSHIP OF THE ATTACHED WELL LOCATIONS TO KERR-McGEE OIL & GAS ONSHORE LP.

**APPROVED** 5/16/06  
*Earlene Russell*  
Division of Oil, Gas and Mining  
Earlene Russell, Engineering Technician

RECEIVED  
MAY 10 2006

DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

**BRAD LANEY**

Title

**ENGINEERING SPECIALIST**

Signature

Date

**May 9, 2006**

**THIS SPACE FOR FEDERAL OR STATE USE**

Approved by

*Brad Laney*

Title

Date

**5-9-06**

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**STATE OF UTAH**  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

FORM 9

5. LEASE DESIGNATION AND SERIAL NUMBER:  
**ML-47060**

**SUNDRY NOTICES AND REPORTS ON WELLS**

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

7. UNIT or CA AGREEMENT NAME:

1. TYPE OF WELL      OIL WELL       GAS WELL       OTHER \_\_\_\_\_

8. WELL NAME and NUMBER:  
**STATE 1021-36G**

2. NAME OF OPERATOR:  
**KERR MCGEE OIL & GAS ONSHORE LP**

9. API NUMBER:  
**4304736417**

3. ADDRESS OF OPERATOR:  
**1368 S. 1200 E.      CITY VERNAL      STATE UT      ZIP 84078**

PHONE NUMBER:  
**(435) 781-7024**

10. FIELD AND POOL, OR WILDCAT:  
**NATURAL BUTTES**

4. LOCATION OF WELL  
FOOTAGES AT SURFACE: **1953'FNL, 1977'FEL**  
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: **SWNE 36 10S 21E**

COUNTY: **UINTAH**

STATE: **UTAH**


11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
<input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>SET SURFACE CSG</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

MIRU BILL MARTIN AIR RIG ON 04/16/2006. DRILLED 12 1/4" SURFACE HOLE TO 1870'. RAN 9 5/8" 32.3# H-40 SURFACE CSG. LEAD CMT W/160 SX HIFILL CLASS G @11.0 PPG 3.82 YIELD. TAILED CMT W/200 SX PREM CLASS G @15.8 PPG 1.15 YIELD. TOP OUT W/200 SX CLASS G @15.8 PPG 1.15 YIELD. CMT TO SURFACE AND STAYED AT SURFACE.

WORT

NAME (PLEASE PRINT) **SHEILA UPCHEGO**  
SIGNATURE 

TITLE **REGULATORY ANALYST**  
DATE **4/20/2006**

(This space for State use only)

**RECEIVED**

APR 20 2006

**STATE OF UTAH**  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

FORM 9

5. LEASE DESIGNATION AND SERIAL NUMBER:  
**ML-47060**

**SUNDRY NOTICES AND REPORTS ON WELLS**

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

7. UNIT or CA AGREEMENT NAME:

8. WELL NAME and NUMBER:  
**STATE 1021-36G**

9. API NUMBER:  
**4304736417**

10. FIELD AND POOL, OR WILDCAT:  
**NATURAL BUTTES**

1. TYPE OF WELL      OIL WELL       GAS WELL       OTHER \_\_\_\_\_

2. NAME OF OPERATOR:  
**KERR MCGEE OIL & GAS ONSHORE LP**

3. ADDRESS OF OPERATOR:      PHONE NUMBER:  
**1368 S 1200 E      CITY: VERNAL      STATE: UT      ZIP: 84078      (435) 781-7024**

4. LOCATION OF WELL      COUNTY: **UINTAH**  
FOOTAGES AT SURFACE: **1953'FNL, 1977'FEL**

QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: **SWNE 36 10S 21E**      STATE: **UTAH**


11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <b>FINAL DRILLING OPERATIONS</b>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

**FINISHED DRILLING FROM 1870' TO 8776' ON 06/05/2006. RAN 4 1/2" 11.6# I-80 PRODUCTION CSG. LEAD CMT W/348 SX PREM LITE II @1 1.3 PPG 3.01 YIELD. TAILED CMT W/1285 SX 50/50 POZ @14.3 PPG 1.31 YIELD. SET SLIPS W95K, CLEAN PITS.**

**RELEASED ENSIGN RIG 81 ON 06/062006 AT 0600 HRS.**

NAME (PLEASE PRINT) **SHEILA UPCHEGO**      TITLE **REGUALTORY ANALYST**  
SIGNATURE       DATE **6/6/2006**

(This space for State use only)

**RECEIVED**  
**JUN 12 2006**

**STATE OF UTAH**  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

FORM 9

<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>			5. LEASE DESIGNATION AND SERIAL NUMBER: <b>ML-47060</b>
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.			6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
			7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____			8. WELL NAME and NUMBER: <b>STATE 1021-36G</b>
2. NAME OF OPERATOR: <b>KERR McGEE OIL AND GAS ONSHORE LP</b>			9. API NUMBER: <b>4304736417</b>
3. ADDRESS OF OPERATOR: 1368 SOUTH 1200 EST CITY <b>VERNAL</b> STATE <b>UT</b> ZIP <b>84078</b>		PHONE NUMBER: <b>(435) 781-7003</b>	10. FIELD AND POOL, OR WILDCAT: <b>NATURAL BUTTES</b>
4. LOCATION OF WELL FOOTAGES AT SURFACE: <b>1953' FNL 1977' FEL</b>			COUNTY: <b>UINTAH</b>
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: <b>SWNE 36 10S 21E</b>			STATE: <b>UTAH</b>

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA			
TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate)  Approximate date work will start: _____  <input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only)  Date of work completion: _____	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> DEEPEN <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> PLUG BACK <input type="checkbox"/> PRODUCTION (START/RESUME) <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	<input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> TEMPORARILY ABANDON <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> WATER SHUT-OFF <input checked="" type="checkbox"/> OTHER: <b>PRODUCTION START-UP</b>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.  
 THE SUBJECT WELL LOCATION WAS PLACED ON PRODUCTION ON 6/25/06 AT 11:00 AM.  
 PLEASE REFER TO THE ATTACHED CHRONOLOGICAL WELL HISTORY.

NAME (PLEASE PRINT) <u>RAMEY HOOPES</u>	TITLE <u>REGULATORY CLERK</u>
SIGNATURE <u><i>Ramey Hoopes</i></u>	DATE <u>6/27/2006</u>

(This space for State use only)

**RECEIVED**  
**JUL 25 2006**

**KERR MCGEE OIL AND GAS ONSHORE LP**

**CHRONOLOGICAL HISTORY**

**STATE 1021-36G**

	SPUD	Surface Casing	Activity	Status
03/21/06			Build Location, 15% Complete	Caza 81
03/22/06			Build Location, 25% Complete	Caza 81
03/23/06			Build Location, 40% Complete	Caza 81
03/24/06			Build Location, 50% Complete	Caza 81
03/30/06			Build Location, 85% Complete	Caza 81
03/31/06			Build Location, 95% Complete	Caza 81
04/03/06			Location Complete, WOBR	Caza 81
04/06/06	04/05/06		Set conductor, WOAR	Caza 81
04/18/06	04/16/06		Air rig spud, Drlg	Caza 81
04/21/06	04/16/06	9 5/8" @ 1826	WORT	Caza 81
05/05/06	04/16/06	9 5/8" @ 1826	Ring in, WORT	Caza 81
05/24/06	TD: 1870'	Csg. 9 5/8" @ 1826'	MW: 8.4 SD: 5/X/06	DSS: 0 Moved rig f/ 1021-36H. 100% moved and 99% rigged up @ report time.
05/26/06	TD: 3200'	Csg. 9 5/8" @ 1826'	MW: 8.5 SD: 5/24/06	DSS: 2 Drill f/ 2425'-2643'. Trip for dropping bit to control deviation. Drl to 3200'. DA @ report time.
05/25/06	TD: 2425'	Csg. 9 5/8" @ 1826'	MW: 8.4 SD: 5/24/06	DSS: 1 Finish RURT. NU and test BOPE. PU BHA and drill FE. Drill to 2268' and mud up due to shallow gas. Drill to 2425'. DA @ report time.
05/29/06	TD: 6298'	Csg. 9 5/8" @ 1826'	MW: 9.6 SD: 5/24/06	DSS: 5 Drill f/ 3200'-4324'. TFNB. Drill and survey f/ 4324'-6298'. DA @ report time.
05/30/06	TD: 7190'	Csg. 9 5/8" @ 1826'	MW: 10.2 SD: 5/24/06	DSS: 6 Drill f/ 6298'-7190'. DA @ report time.
05/31/06	TD: 7746'	Csg. 9 5/8" @ 1826'	MW: 10.2 SD: 5/24/06	DSS: 7 Drill f/ 7190'-7746'. DA @ report time.

6/1/06 TD: 7940' Csg. 9 5/8" @ 1826' MW: 10.5 SD: 5/24/06 DSS: 8  
Drill f/ 7746'-7940'. TFNB. TIH @ report time.

06/02/06 TD: 8254' Csg. 9 5/8" @ 1826' MW: 11.0 SD: 5/24/06 DSS: 9  
Finish TIH. Drill f/ 7940'-8247'. TOOH 10 stands and repair swivel. Drill to 8254'. DA @  
report time.

06/05/06 TD: 8776' Csg. 9 5/8" @ 1826' MW: 11.6 SD: 5/24/06 DSS: 12  
Drill f/ 8524'-8279'. TFNB and PU IBS. Drill to 8301' and stuck pipe. Came free and  
POOH to LD IBS. TIH and drill f/ 8301'- 8776'. CCH and short trip. LDDS. Logging @  
report time.

06/06/06 TD: 8776' Csg. 9 5/8" @ 1826' MW: 11.6 SD: 5/24/06 DSS: 12  
Run Triple Combo. Run and cement 4 1/2" Production Casing set @ 8776'. Set slips and ND  
BOPE. Cut casing and release rig @ 0600 hrs 6/6/06.

06/19/06 PROG: 7:AM MOVE IN EQUIP, & SPOT

06/20/06 PROG: 7:AM HSM . RU CUTTERS . RUN CBL FROM 8682 TO SURFACE .RU BASIN  
WELL . ND WELLHEAD , NU FRAC VALVES . PREP TO FRAC IN AM .

06/21/06 PROG: 7:AM HSM . RU TEST UNIT . PRES TO 7500 , HELD . RU CUTTERS & BJ . STAGE  
1# RIH PERF 8428-32 , 8491-97 , 8675-76 , 4SPF , 44HOLES , BROKE @ 5018 , IR 49.4 , IP  
4713 , ISIP 2714 , FG .75 , MP 5285 , MR 51.2 , AP 4554 , AR 49.3 , FG .75 , ISIP 2672 , NPI -  
42 , CLEAN 2002 BBLS , SAND 69,900# SLICK.

STAGE 2# SET CBP @ 8325 , PERF 8068-72 ,4SPF , 8124-27 ,4SPF , 8165-67 ,3SPF , 8292-95,  
4SPF , 46 HOLES , BROKE @ 4526 , IR 46 , IP 5400 , ISIP 3232 , FG .83 , MP 5851 , MR 51.4 ,  
AP 5490 , AR 48.7 , FG .79 , ISIP 2858 , NPI 374 , CLEAN 2392 BBLS , SAND 90,518# SLICK

STAGE 3# SET CBP @ 8022 , PERF 7754-58 ,3SPF , 7809-10 ,4SPF , 7902-06 ,4SPF , 7942-44,  
4SPF , 7991-92 ,3SPF , 43 HOLES , BROKE @ 7090 , IR 45.6 , IP 5000 , ISIP 2360 , FG .73 ,  
MP 6256 , MR 49.4 , AP 5472 , AR 47.7 , FG .75 , ISIP 2453 , NPI 93 , CLEAN 2069 BBLS ,  
SAND 78,650# , SLICK

STAGE 4# SET CBP @ 7683 , PERF 7526-28 ,4SPF , 7565-68 ,4SPF , 7610-15 ,4SPF , 7654-56,  
3SPF , BROKE @ 5360 , IR 49.1 , IP 4700 , ISIP 2482 , FG .76 , MP 4840 , MR 49.3 , AP 4416 ,  
AR 49.1 , FG .76 , ISIP 2496 , NPI 14 , CLEAN 2204 BBLS , SAND 85,000#

06/22/06 PROG: 7:AM HSM STAGE 5# PERFS 7174-7426 . BROKE @ 3809 , IR 48 , IP 5500 , ISIP  
2760 , FG .81 , MP 6598 , MR 51.8 , AP 5319 , AR 49.9 , FG .80 , ISIP 2715 , NPI -45 , CLEAN  
1081 BBLS , SAND 21,100# SLICK

STAGE 6# SET CBP @ 7118 , PERF 6868-71 , 4SPF , 6954-56 ,4SPF , 6983-85 ,4SPF , 7082-88  
, 3SPF , BROKE @ 2905 , IR 51.3 , IP 4700 , ISIP 2439 , FG .78 , MP 4748 , MR 51.4 , AP 4528  
, AR 51.2 , FG .86 , ISIP 3015 , NPI 576 , CLEAN 795 BBLS , SAND 27,300#

STAGE 7# SET CBP @ 6770 , PERF 6506-08 , 2SPF , 6538-42 ,4SPF , 6552 -54 ,3SPF , 6728-  
33 , 4SPF , 46 HOLES , BROKE @ 2865 , IR 51.8 , IP 4000 , ISIP 1567 , FG .67 , MP 4050 , MR  
51.8 , AP 3898 , AR 51.7 , FG .87 , ISIP 2878 , NPI 1311 , CLEAN 2316 BBLS , SAND 90,300#  
, SLICKWATER .

STAGE 8# SET CBP @ 6470 , PERF 5884-86 ,3SPF , 5898-5901 ,3SPF , 6118-23 ,4SPF , 6432-  
34 ,4SPF , BROKE @ 1978 , IR 50.6 , IP 4000 , ISIP 1677 , FG .71 , MP 4200 , MR 51.2 , AP

3825 , AR 50.9 , FG .84 , ISIP 2482 , NPI 805 , CLEAN 641 , SAND 22,475# .

STAGE 9# SET CBP @ 5515 , PERF 4726-28 , 4810-16 , 5483-85 ,4SPF 40 HOLES , BROKE @ 2123 , IR 52.3 , IP 3000 , ISIP 1082 , FG .65 , MP 3064 , MR 52.3 , AP 2944 , AR 52 , FG .75 , ISIP 1885 , NPI 803 , CLEAN 641 BBLS , SAND 21,750 # . TOTALS= SAND 506,993# , CLEAN 14,141 BBLS . DVE 1071 GAL. RIH SET CBP @ 4650 . RD CUTTERS & BJ . ND FRAC VALVES , NU BOP

**06/23/06**

06/23/06 PROG: 7:AM HSM . OPEN WELL RIH PU 23/8" TBG . TAG CBP @ 4650' . RU DRILL EQUIP BROKE CONV CIR . DRILL 1# CBP @ 4650' . 50 PSI INC .RIH TAG @ 5485 ,30' SAND . DRILL DOWN TO 2# CBP @ 5515 , DRILL UP , 150 PSI INC. RIH TAG @ 6370' , 100' SAND . DRILL DOWN TO 3# CBP @ 6470' , DRILL UP CBP , 150 PSI INC . RIH TAG @ 6710 ,60' SAND . DRILL DOWN TO 4# CBP @ 6770' . DRILL UP CBP , 150 PSI INC . RIH TAG @ 7082 ,30' SAND . DRILL DOWN TO 5# CBP @ 7112' DRILL UP , 100 PSI INC. RIH TAG @ 7380' ,100 SAND . DRILLDOWN TO 6# CBP @ 7480' .300 PSI INC . RIH TAG @ 7563' , 120' SAND . DRILL DOWN TO 7# CBP @ 7683 DRILL UP CBP , 100 PSI INC . RIH TAG @ 7932 , 90' SAND . DRILL DOWN TO 8# CBP @ 8022' . 100 PSI INC .RIH TAG @ 8205 , 120' SAND . DRILL DOWN TO 9# CBP @ 8325' . DRILL UP CBP , NO INC . RIH TAG @ 8580' . DRILL DOWN TO PBTD @ 8703' . CIR WELL CLEAN .RD DRILL EQUIP . POOH LD 38

06/24/06 PROG: 7:AM HSM . OPEN WELL 1400 PSI . BLOW WELL DOWN . LAND TBG W/ 237 JTS IN WELL . EOT @ 7509.80 . ND BOP . NU WELLHEAD . DROP BALL POBS . PUT WELL FLOWING TO PIT . TURN WELL OVER TO FLOWBACK CREW . RD DOWN RIG . MOVE OFF.

**06/26/06**

PROG: WELL WENT ON SALES: 06/25/06, 11:00 A.M., 500 MCF, 20/64 CHK, SICP: 1500 #. FTP: 1100 #, 33 BWPH.

**06/27/06**

**ON SALES**

06/25/06: 192 MCF, 0 BC, 765 BW, TP: 1250#, CP: 1450#, 20/64 CHK, 18 HRS, LP: 200#.

**STATE OF UTAH**  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

AMENDED REPORT  FORM 8  
(highlight changes)

**WELL COMPLETION OR RECOMPLETION REPORT AND LOG**

5. LEASE DESIGNATION AND SERIAL NUMBER:  
**ML-47060**

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT or CA AGREEMENT NAME

8. WELL NAME and NUMBER:  
**STATE 1021-36G**

9. API NUMBER:  
**4304736417**

10. FIELD AND POOL, OR WILDCAT  
**NATURAL BUTTES**

11. QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:  
**SWNE 36 10S 21E**

12. COUNTY  
**UINTAH**

13. STATE  
**UTAH**

1a. TYPE OF WELL: OIL WELL  GAS WELL  DRY  OTHER \_\_\_\_\_

b. TYPE OF WORK: NEW WELL  HORIZ. LATS.  DEEP-EN  RE-ENTRY  DIFF. RESVR.  OTHER \_\_\_\_\_

2. NAME OF OPERATOR:  
**KERR MCGEE OIL & GAS ONSHORE LP**

3. ADDRESS OF OPERATOR: **1368 S 1200 E** CITY **VERNAL** STATE **UT** ZIP **84078** PHONE NUMBER: **(435) 781-7024**

4. LOCATION OF WELL (FOOTAGES)  
AT SURFACE: **1953'FNL, 1977'FEL**  
AT TOP PRODUCING INTERVAL REPORTED BELOW:  
AT TOTAL DEPTH:

14. DATE SPUNDED: **4/5/2006** 15. DATE T.D. REACHED: **6/5/2006** 16. DATE COMPLETED: **6/25/2006** ABANDONED  READY TO PRODUCE

17. ELEVATIONS (DF, RKB, RT, GL):  
**5424'GL**

18. TOTAL DEPTH: MD **8,776** TVD \_\_\_\_\_ 19. PLUG BACK T.D.: MD **8,703** TVD \_\_\_\_\_ 20. IF MULTIPLE COMPLETIONS, HOW MANY? \* \_\_\_\_\_ 21. DEPTH BRIDGE MD \_\_\_\_\_ PLUG SET: TVD \_\_\_\_\_

22. TYPE ELECTRIC AND OTHER MECHANICAL LOGS RUN (Submit copy of each)  
**CBL-CCCL-GR**

23. WAS WELL CORED? NO  YES  (Submit analysis)  
WAS DST RUN? NO  YES  (Submit report)  
DIRECTIONAL SURVEY? NO  YES  (Submit copy)

**24. CASING AND LINER RECORD (Report all strings set in well)**

HOLE SIZE	SIZE/GRADE	WEIGHT (#/ft.)	TOP (MD)	BOTTOM (MD)	STAGE CEMENTER DEPTH	CEMENT TYPE & NO. OF SACKS	SLURRY VOLUME (BBL)	CEMENT TOP **	AMOUNT PULLED
20"	14" STL	36.7#		40		28			
12 1/4"	9 5/8 H-40	32.3#		1,870		560			
7 7/8"	4 1/2 I-80	11.6#		8,776		1633			

**25. TUBING RECORD**

SIZE	DEPTH SET (MD)	PACKER SET (MD)	SIZE	DEPTH SET (MD)	PACKER SET (MD)	SIZE	DEPTH SET (MD)	PACKER SET (MD)
2 3/8	7,510							

**26. PRODUCING INTERVALS**

FORMATION NAME	TOP (MD)	BOTTOM (MD)	TOP (TVD)	BOTTOM (TVD)	INTERVAL (Top/Bot - MD)	SIZE	NO. HOLES	PERFORATION STATUS	
(A) WASATCH	4,726	6,434			4,726 6,434	0.35	83	Open <input checked="" type="checkbox"/>	Squeezed <input type="checkbox"/>
(B) WAS/MESA	6,506	6,733			6,506 6,733	0.35	46	Open <input checked="" type="checkbox"/>	Squeezed <input type="checkbox"/>
(C) MESAVERDE	6,868	8,676			6,868 8,676	0.35	267	Open <input checked="" type="checkbox"/>	Squeezed <input type="checkbox"/>
(D)								Open <input type="checkbox"/>	Squeezed <input type="checkbox"/>

**28. ACID, FRACTURE, TREATMENT, CEMENT SQUEEZE, ETC.**

DEPTH INTERVAL	AMOUNT AND TYPE OF MATERIAL
4726'-6434'	PMP 1282 BBLs SLICK H2O & 44,225# 30/50 MESH SD
6506'-6733'	PMP 2316 BBLs SLICK H2O & 90,300# 30/50 MESH SD
6868'-8676'	PMP 10,543 BBLs SLICK H2O & 372,468# 30/50 MESH SD

**29. ENCLOSED ATTACHMENTS:**

- ELECTRICAL/MECHANICAL LOGS  GEOLOGIC REPORT  DST REPORT  DIRECTIONAL SURVEY  
 SUNDRY NOTICE FOR PLUGGING AND CEMENT VERIFICATION  CORE ANALYSIS  OTHER: \_\_\_\_\_

**30. WELL STATUS:**

**PROD**

31. INITIAL PRODUCTION

INTERVAL A (As shown in Item #26)

DATE FIRST PRODUCED: 6/25/2006		TEST DATE: 6/30/2006		HOURS TESTED: 24		TEST PRODUCTION RATES: →		OIL – BBL: 0	GAS – MCF: 2,808	WATER – BBL: 561	PROD. METHOD: FLOWING
CHOKE SIZE: 22/64	TBG. PRESS. 1,772	CSG. PRESS. 2,181	API GRAVITY	BTU – GAS	GAS/OIL RATIO	24 HR PRODUCTION RATES: →	OIL – BBL: 0	GAS – MCF: 2,808	WATER – BBL: 561	INTERVAL STATUS: PROD	

INTERVAL B (As shown in Item #26)

DATE FIRST PRODUCED: 6/25/2006		TEST DATE: 6/30/2006		HOURS TESTED: 24		TEST PRODUCTION RATES: →		OIL – BBL: 0	GAS – MCF: 2,808	WATER – BBL: 561	PROD. METHOD: FLOWING
CHOKE SIZE: 22/64	TBG. PRESS. 1,772	CSG. PRESS. 2,181	API GRAVITY	BTU – GAS	GAS/OIL RATIO	24 HR PRODUCTION RATES: →	OIL – BBL: 0	GAS – MCF: 2,808	WATER – BBL: 561	INTERVAL STATUS: PROD	

INTERVAL C (As shown in Item #26)

DATE FIRST PRODUCED: 6/25/2006		TEST DATE: 6/30/2006		HOURS TESTED: 24		TEST PRODUCTION RATES: →		OIL – BBL: 0	GAS – MCF: 2,808	WATER – BBL: 561	PROD. METHOD: FLOWING
CHOKE SIZE: 22/64	TBG. PRESS. 1,772	CSG. PRESS. 2,181	API GRAVITY	BTU – GAS	GAS/OIL RATIO	24 HR PRODUCTION RATES: →	OIL – BBL: 0	GAS – MCF: 2,808	WATER – BBL: 561	INTERVAL STATUS: PROD	

INTERVAL D (As shown in Item #26)

DATE FIRST PRODUCED:		TEST DATE:		HOURS TESTED:		TEST PRODUCTION RATES: →		OIL – BBL:	GAS – MCF:	WATER – BBL:	PROD. METHOD:
CHOKE SIZE:	TBG. PRESS.	CSG. PRESS.	API GRAVITY	BTU – GAS	GAS/OIL RATIO	24 HR PRODUCTION RATES: →	OIL – BBL:	GAS – MCF:	WATER – BBL:	INTERVAL STATUS:	

32. DISPOSITION OF GAS (Sold, Used for Fuel, Vented, Etc.)  
**SOLD**

33. SUMMARY OF POROUS ZONES (Include Aquifers):


Show all important zones of porosity and contents thereof: Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

34. FORMATION (Log) MARKERS:

Formation	Top (MD)	Bottom (MD)	Descriptions, Contents, etc.	Name	Top (Measured Depth)
WASATCH MESAVERDE	4,060 6,682	6,682			

35. ADDITIONAL REMARKS (Include plugging procedure)

36. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records.

NAME (PLEASE PRINT) SHEILA UPCHEGO TITLE REGULATORY ANALYST  
 SIGNATURE  DATE 7/19/2006

This report must be submitted within 30 days of

- completing or plugging a new well
- drilling horizontal laterals from an existing well bore
- recompleting to a different producing formation
- reentering a previously plugged and abandoned well
- significantly deepening an existing well bore below the previous bottom-hole depth
- drilling hydrocarbon exploratory holes, such as core samples and stratigraphic tests

\* ITEM 20: Show the number of completions if production is measured separately from two or more formations.

\*\* ITEM 24: Cement Top – Show how reported top(s) of cement were determined (circulated (CIR), calculated (CAL), cement bond log (CBL), temperature survey (TS)).

Send to: Utah Division of Oil, Gas and Mining  
 1594 West North Temple, Suite 1210  
 Box 145801  
 Salt Lake City, Utah 84114-5801

Phone: 801-538-5340  
 Fax: 801-359-3940

**RECEIVED**  
 AUG 0 1 2006

DIV. OF OIL, GAS & MINING

<b>STATE OF UTAH</b> DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	<b>FORM 9</b>  <b>5. LEASE DESIGNATION AND SERIAL NUMBER:</b> ML-47060
<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>  Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	<b>6. IF INDIAN, ALLOTTEE OR TRIBE NAME:</b>  <b>7. UNIT or CA AGREEMENT NAME:</b>
<b>1. TYPE OF WELL</b> Gas Well	<b>8. WELL NAME and NUMBER:</b> STATE 1021-36G
<b>2. NAME OF OPERATOR:</b> KERR-MCGEE OIL & GAS ONSHORE, L.P.	<b>9. API NUMBER:</b> 43047364170000
<b>3. ADDRESS OF OPERATOR:</b> P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779	<b>PHONE NUMBER:</b> 720 929-6007 Ext
<b>4. LOCATION OF WELL</b> <b>FOOTAGES AT SURFACE:</b> 1953 FNL 1977 FEL <b>QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:</b> Qtr/Qtr: SWNE Section: 36 Township: 10.0S Range: 21.0E Meridian: S	<b>9. FIELD and POOL or WILDCAT:</b> NATURAL BUTTES  <b>COUNTY:</b> UINTAH  <b>STATE:</b> UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:	<input type="checkbox"/> ACIDIZE  <input type="checkbox"/> CHANGE TO PREVIOUS PLANS  <input type="checkbox"/> CHANGE WELL STATUS  <input type="checkbox"/> DEEPEN  <input type="checkbox"/> OPERATOR CHANGE  <input type="checkbox"/> PRODUCTION START OR RESUME  <input type="checkbox"/> REPERFORATE CURRENT FORMATION  <input type="checkbox"/> TUBING REPAIR  <input type="checkbox"/> WATER SHUTOFF  <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING  <input type="checkbox"/> CHANGE TUBING  <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS  <input type="checkbox"/> FRACTURE TREAT  <input type="checkbox"/> PLUG AND ABANDON  <input type="checkbox"/> RECLAMATION OF WELL SITE  <input type="checkbox"/> SIDETRACK TO REPAIR WELL  <input type="checkbox"/> VENT OR FLARE  <input type="checkbox"/> SI TA STATUS EXTENSION  <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR  <input type="checkbox"/> CHANGE WELL NAME  <input type="checkbox"/> CONVERT WELL TYPE  <input type="checkbox"/> NEW CONSTRUCTION  <input type="checkbox"/> PLUG BACK  <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION  <input type="checkbox"/> TEMPORARY ABANDON  <input type="checkbox"/> WATER DISPOSAL  <input type="checkbox"/> APD EXTENSION  OTHER: <input style="width: 50px;" type="text"/>
<input checked="" type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: 12/9/2010			
<input type="checkbox"/> SPUD REPORT Date of Spud:			
<input type="checkbox"/> DRILLING REPORT Report Date:			

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

This well returned to production on 12/9/2010.

**Accepted by the  
Utah Division of  
Oil, Gas and Mining  
FOR RECORD ONLY**

<b>NAME (PLEASE PRINT)</b> Andy Lytle	<b>PHONE NUMBER</b> 720 929-6100	<b>TITLE</b> Regulatory Analyst
<b>SIGNATURE</b> N/A		<b>DATE</b> 12/27/2010

**STATE OF UTAH**  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS, AND MINING

**FORM 9**

**5. LEASE DESIGNATION AND SERIAL NUMBER:**  
ML-47060

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

**6. IF INDIAN, ALLOTTEE OR TRIBE NAME:**

**7. UNIT or CA AGREEMENT NAME:**

**1. TYPE OF WELL**  
Gas Well

**8. WELL NAME and NUMBER:**  
STATE 1021-36G

**2. NAME OF OPERATOR:**  
KERR-MCGEE OIL & GAS ONSHORE, L.P.

**9. API NUMBER:**  
43047364170000

**3. ADDRESS OF OPERATOR:** P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779  
**PHONE NUMBER:** 720 929-6515 Ext

**9. FIELD and POOL or WILDCAT:**  
NATURAL BUTTES

**4. LOCATION OF WELL FOOTAGES AT SURFACE:**  
1953 FNL 1977 FEL  
**QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:**  
Qtr/Qtr: SWNE Section: 36 Township: 10.0S Range: 21.0E Meridian: S

**COUNTY:**  
UINTAH

**STATE:**  
UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:  <input checked="" type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: 3/2/2011  <input type="checkbox"/> SPUD REPORT Date of Spud:  <input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input checked="" type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> APD EXTENSION OTHER: <input type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.  
This well returned to production on 3/2/2011.

**Accepted by the  
Utah Division of  
Oil, Gas and Mining  
FOR RECORD ONLY**

<b>NAME (PLEASE PRINT)</b> Andy Lytle	<b>PHONE NUMBER</b> 720 929-6100	<b>TITLE</b> Regulatory Analyst
<b>SIGNATURE</b> N/A	<b>DATE</b> 3/17/2011	

**STATE OF UTAH**  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

FORM 6

**ENTITY ACTION FORM**

Operator: KERR MCGEE OIL & GAS ONSHORE LP Operator Account Number: N 2995  
 Address: 1368 SOUTH 1200 EAST  
city VERNAL  
state UT zip 84078 Phone Number: (435) 781-7024

Well 1

API Number	Well Name		QQ	Sec	Twp	Rng	County
Various	NBU REVISION						UINTAH
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
E	Various	2900	3/13/2012			2/1/2012	
<b>Comments:</b> MOVE THE ATTACHED WELLS INTO THE NATURAL BUTTES UNIT REVISION EFFECTIVE 02/01/2012. <i>72 wells</i> <span style="float: right;">5/31/2012</span>							

Well 2

API Number	Well Name		QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
<b>Comments:</b>							

Well 3

API Number	Well Name		QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
<b>Comments:</b>							

**ACTION CODES:**

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (Explain in 'comments' section)

SHEILA WOPSOCK

Name (Please Print)

Signature

REGULATORY ANALYST

Title

5/30/2012

Date

**RECEIVED**

**MAY 31 2012**

Div. of Oil, Gas & Mining

Entity Action Form Attachment for wells moved into the Natural Buttes Unit Effective 02/01/2012.

API	Well Name	QTR/QTR	Section	TWNSHP	RANGE	Producing Intervals
4304737079	FEDERAL 920-25I	NESE	15431	25 9S	20E	WASATCH/MESAVERDE
4304737080	FEDERAL 920-25H	SENE	15761	25 9S	20E	WASATCH/MESAVERDE
4304737081	FEDERAL 920-25A	NENE	15553	25 9S	20E	WASATCH/MESAVERDE from MURD
4304739098	STATE 1021-28M	SWSW	16499	28 10S	21E	WASATCH To WSMVD
4304737918	FEDERAL 1021-26L	NWSW	16390	26 10S	21E	MESAVERDE To WSMVD
4304737919	FEDERAL 1021-26N	SESW	16391	26 10S	21E	WASATCH/MESAVERDE
4304737916	FEDERAL 1021-25O	SWSE	16277	25 10S	21E	WASATCH/MESAVERDE
4304739112	STATE 1021-31M	SWSW	16454	31 10S	21E	WASATCH To WSMVD
4304739127	STATE 1021-32P	SESE	16471	32 10S	21E	WASATCH/MESAVERDE
4304739128	STATE 1021-32O	SWSE	17513	32 10S	21E	WASATCH/MESAVERDE
4304739131	STATE 1021-32L	NWSW	16902	32 10S	21E	WASATCH/MESAVERDE
4304739133	STATE 1021-32J	NWSE	17529	32 10S	21E	WASATCH/MESAVERDE
4304739134	STATE 1021-32I	NESE	16905	32 10S	21E	WSMVD
4304739135	STATE 1021-32H	SENE	17528	32 10S	21E	WASATCH/MESAVERDE
4304735714	FEDERAL 1022-29H	SENE	15147	29 10S	22E	WASATCH/MESAVERDE
4304735715	FEDERAL 1022-29F	SENW	15162	29 10S	22E	WASATCH/MESAVERDE
4304735716	FEDERAL 1022-29B	NWNE	11492	29 10S	22E	WASATCH/MESAVERDE
4304735737	FEDERAL 1022-29I	NESE	15001	29 10S	22E	WASATCH/MESAVERDE
4304735738	FEDERAL 1022-29D	NWNW	15016	29 10S	22E	MESAVERDE To WSMVD
4304734862	FEDERAL 31-10-22	SESE	13879	31 10S	22E	MESAVERDE To WSMVD
4304735173	FEDERAL 1022-31D	NWNW	14132	31 10S	22E	WASATCH/MESAVERDE
4304736492	FEDERAL 1022-31N	SESW	16255	31 10S	22E	WASATCH/MESAVERDE
4304736493	FEDERAL 1022-31I	NESE	15089	31 10S	22E	WASATCH/MESAVERDE
4304736494	FEDERAL 1022-31G	SWNE	15075	31 10S	22E	WASATCH/MESAVERDE
4304736495	FEDERAL 1022-31F	SENE	15230	31 10S	22E	WASATCH/MESAVERDE
4304736574	FEDERAL 1022-31C	NENW	15090	31 10S	22E	WASATCH/MESAVERDE
4304736575	FEDERAL 1022-31J	NWSE	15214	31 10S	22E	WASATCH/MESAVERDE
4304736576	FEDERAL 1022-31L	NWSW	16276	31 10S	22E	WASATCH/MESAVERDE
4304734317	STATE 1-32	NESW	13419	32 10S	22E	WASATCH/MESAVERDE
4304734831	STATE 2-32	SESW	13842	32 10S	22E	MESAVERDE To WSMVD
4304734832	STATE 3-32	NWSW	13844	32 10S	22E	WASATCH/MESAVERDE
4304735095	STATE 1022-32J	NWSE	114097	32 10S	22E	WSMVD
4304735096	STATE 1022-32A	NENE	13914	32 10S	22E	WASATCH/MESAVERDE
4304735186	STATE 1022-32P	SESE	14131	32 10S	22E	MESAVERDE To WSMVD
4304735315	STATE 1022-32O	SWSE	14114	32 10S	22E	WASATCH/MESAVERDE
4304735647	STATE 1022-32H	SENE	14348	32 10S	22E	MESAVERDE To WSMVD
4304736413	STATE 1021-36O	SWSE	15619	36 10S	21E	WASATCH/MESAVERDE
*4304738157	WELL BELONGS TO QEP ENERGY CORP "GH 8-20-8-21" PERMIT NOT APPROVED					
4304734839	FEDERAL 1022-15F	SENW	14618	15 10S	22E	WASATCH/MESAVERDE
4304736414	STATE 1021-36J	NWSE	15651	36 10S	21E	WASATCH/MESAVERDE
4304738152	STATE 1021-36L	NWSW	16012	36 10S	21E	WASATCH/MESAVERDE
4304735440	FEDERAL 1022-15J	NWSE	14617	15 10S	22E	WASATCH/MESAVERDE
4304736415	STATE 1021-36I	NESE	15684	36 10S	21E	WASATCH/MESAVERDE
4304738845	STATE 1021-36D	NWNW	16455	36 10S	21E	WASATCH/MESAVERDE

4304750096	FEDERAL 1022-27H	SENE	17626	27 10S	22E	WASATCH/MESAVERDE	
4304736416	STATE 1021-36H	SENE	15335	36 10S	21E	WASATCH/MESAVERDE	
4304738846	STATE 1021-36E	SWNW	16523	36 10S	21E	WASATCH/MESAVERDE	
4304735676	FEDERAL 1022-28L	NWSW	15110	28 10S	22E	WASATCH/MESAVERDE	
4304736417	STATE 1021-36G	SWNE	15297	36 10S	21E	WASATCH/MESAVERDE	
4304738847	STATE 1021-36F	SENE	16394	36 10S	21E	WASATCH/MESAVERDE	
4304735713	FEDERAL 1022-28N	SESW	15145	28 10S	22E	WASATCH/MESAVERDE	
4304736418	STATE 1021-36B	NWNE	14953	36 10S	21E	WASATCH/MESAVERDE	
4304738848	STATE 1021-36N	SESW	16359	36 10S	21E	WASATCH/MESAVERDE	
4304735735	FEDERAL 1022-28O	SWSE	15285	28 10S	22E	WASATCH/MESAVERDE	from MURD
4304736419	STATE 1021-36A	NENE	15035	36 10S	21E	WASATCH/MESAVERDE	
4304738849	STATE 1021-36K	NESW	16084	36 10S	21E	WASATCH/MESAVERDE	
4304735736	FEDERAL 1022-28M	SWSW	15286	28 10S	22E	WASATCH/MESAVERDE	
4304736420	STATE 1021-36P	SESE	15372	36 10S	21E	WASATCH/MESAVERDE	
4304738850	STATE 1021-36C	NENW	16396	36 10S	21E	WASATCH/MESAVERDE	
4304734861	FEDERAL 29-10-22	SESE	14006	29 10S	22E	MESAVERDE	TO WSMVD
4304735577	FEDERAL 1022-33O	SWSE	15080	33 10S	22E	WASATCH/MESAVERDE	
4304735739	FEDERAL 1022-33E	SWNW	15193	33 10S	22E	WASATCH/MESAVERDE	
4304735740	FEDERAL 1022-33M	SWSW	15373	33 10S	22E	WASATCH/MESAVERDE	
4304735741	FEDERAL 1022-33L	NWSW	15511	33 10S	22E	WASATCH/MESAVERDE	
4304735742	FEDERAL 1022-33G	SWNE	15404	33 10S	22E	WASATCH/MESAVERDE	from MURD
4304735743	FEDERAL 1022-33C	NENW	15405	33 10S	22E	WASATCH/MESAVERDE	
4304735744	FEDERAL 1022-33A	NENE	15539	33 10S	22E	WASATCH/MESAVERDE	
4304737105	FEDERAL 1022-33D	NWNW	16502	33 10S	22E	WASATCH/MESAVERDE	
4304737106	FEDERAL 1022-33F	SENE	16560	33 10S	22E	WASATCH/MESAVERDE	from WSTC
4304737107	FEDERAL 1022-33K	NESW	16124	33 10S	22E	WASATCH/MESAVERDE	
4304737109	FEDERAL 1022-33N	SESW	16126	33 10S	22E	WASATCH/MESAVERDE	
4304737110	FEDERAL 1022-33B	NWNE	16561	33 10S	22E	WASATCH/MESAVERDE	
4304735810	STATE 1021-36E	SWNW	14295	36 10S	21E	WASATCH/MESAVERDE	

<b>STATE OF UTAH</b> DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	<b>FORM 9</b>  <b>5.LEASE DESIGNATION AND SERIAL NUMBER:</b> ML-47060
<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>  Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	<b>6. IF INDIAN, ALLOTTEE OR TRIBE NAME:</b>  <b>7.UNIT or CA AGREEMENT NAME:</b> NATURAL BUTTES
<b>1. TYPE OF WELL</b> Gas Well	<b>8. WELL NAME and NUMBER:</b> STATE 1021-36G
<b>2. NAME OF OPERATOR:</b> KERR-MCGEE OIL & GAS ONSHORE, L.P.	<b>9. API NUMBER:</b> 43047364170000
<b>3. ADDRESS OF OPERATOR:</b> P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779	<b>PHONE NUMBER:</b> 720 929-6456  <b>9. FIELD and POOL or WILDCAT:</b> NATURAL BUTTES
<b>4. LOCATION OF WELL</b> <b>FOOTAGES AT SURFACE:</b> 1953 FNL 1977 FEL <b>QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:</b> Qtr/Qtr: SWNE Section: 36 Township: 10.0S Range: 21.0E Meridian: S	<b>COUNTY:</b> Uintah  <b>STATE:</b> UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> <b>NOTICE OF INTENT</b> Approximate date work will start: 7/7/2016	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> <b>SUBSEQUENT REPORT</b> Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> <b>SPUD REPORT</b> Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> <b>DRILLING REPORT</b> Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input checked="" type="checkbox"/> <b>PLUG AND ABANDON</b>	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width:100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Kerr-McGee Oil & Gas Onshore, LP respectfully requests to plug and abandon the STATE 1021-36G (single) well. Please see the attached procedure for details. Thank you.

**Approved by the  
Utah Division of  
Oil, Gas and Mining**

**Date:** July 28, 2016  
**By:** *Derek Duff*

**Please Review Attached Conditions of Approval**

<b>NAME (PLEASE PRINT)</b> Candice Barber	<b>PHONE NUMBER</b> 435 781-9749	<b>TITLE</b> HSE Representative
<b>SIGNATURE</b> N/A	<b>DATE</b> 7/7/2016	



**The Utah Division of Oil, Gas, and Mining**

- State of Utah  
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

**Sundry Conditions of Approval Well Number 43047364170000**

- 1. Notify the Division at least 24 hours prior to conducting abandonment operations. Please call Dan Jarvis at 801-538-5338.**
- 2. Amend Plug #1: A minimum of 8 sx shall be spotted on the CIBP @ 6660'.**
- 3. All balanced plugs shall be tagged to ensure that they are at the depth specified.**
- 4. All annuli shall be cemented from a minimum depth of 100' to the surface.**
- 5. Surface reclamation shall be done in accordance with R649-3-34 – Well Site Restoration.**
- 6. All requirements in the Oil and Gas Conservation General Rule R649-3-24 shall apply.**
- 7. If there are any changes to the procedure or the wellbore configuration, notify Dustin Doucet at 801-538-5281 (ofc) or 801-733-0983 (home) prior to continuing with the procedure.**
- 8. All other requirements for notice and reporting in the Oil and Gas Conservation General Rules shall apply.**

7/28/2016

# Wellbore Diagram

r263

API Well No: 43-047-36417-00-00 Permit No: Well Name/No: STATE 1021-36G  
 Company Name: KERR-MCGEE OIL & GAS ONSHORE, L.P.

Location: Sec: 36 T: 10S R: 21E Spot: SWNE


Coordinates: X: 628480 Y: 4418402

Field Name: NATURAL BUTTES

County Name: UINTAH

### String Information

String	Bottom (ft sub)	Diameter (inches)	Weight (lb/ft)	Length (ft)	Capacity (f/cst)
HOL1	40	20			
COND	40	14	36.7	40	
HOL2	1870	12.25			
SURF	1870	9.625	32.3	1870	
HOL3	8776	7.875			
PROD	8776	4.5	11.6	8776	11.459

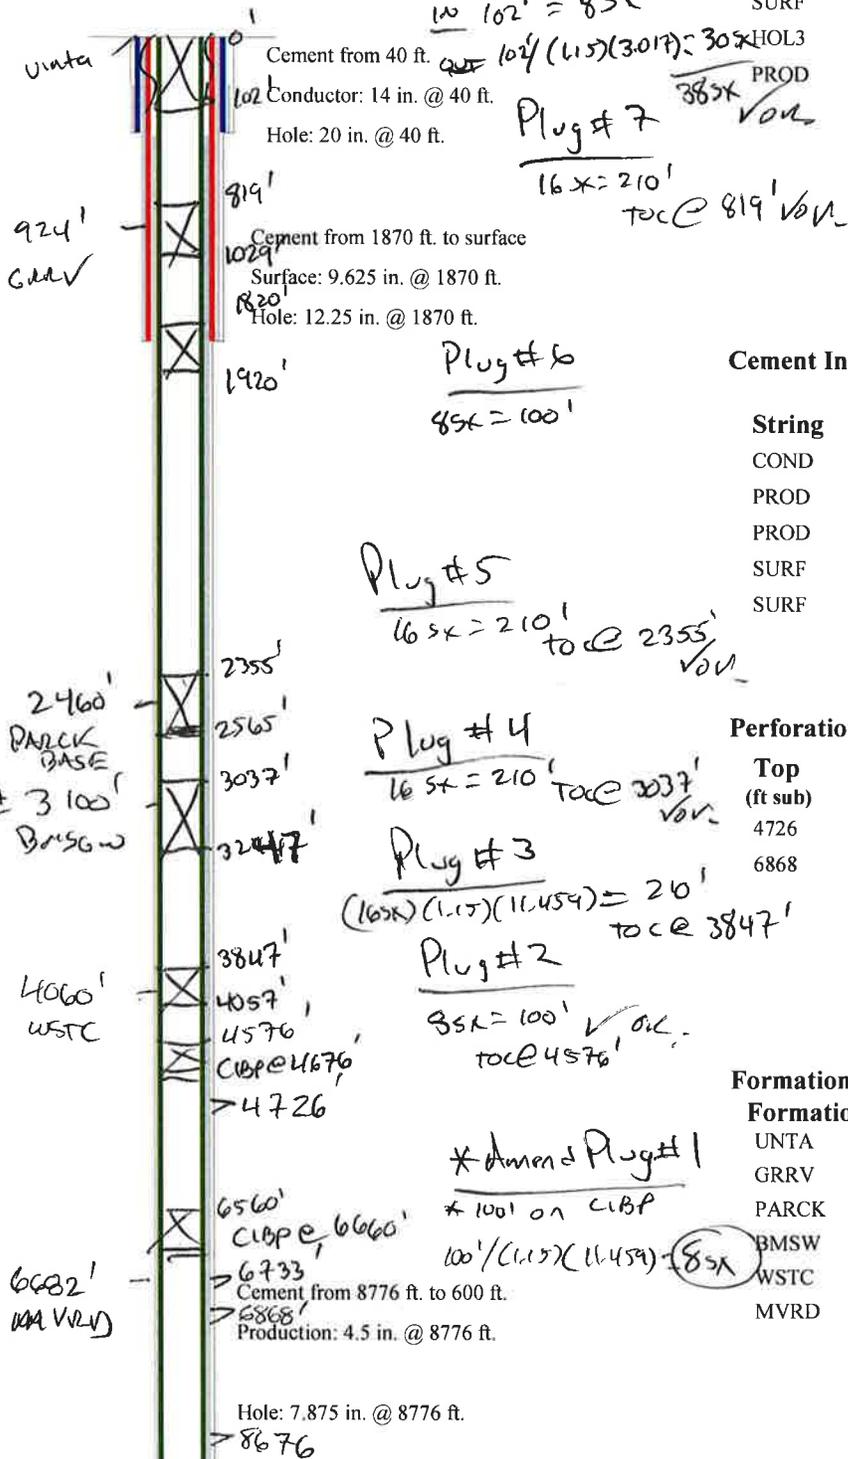

### Cement Information

String	BOC (ft sub)	TOC (ft sub)	Class	Sacks
COND	40		UK	28
PROD	8776	600	HS	348
PROD	8776	600	50	1285
SURF	1870	0	HG	160
SURF	1870	0	G	400

### Perforation Information

Top (ft sub)	Bottom (ft sub)	Shts/Ft	No Shts	Dt Squeeze
4726	6733			
6868	8676			

### Formation Information

Formation	Depth
UNTA	0
GRRV	924
PARCK	2460
BMSW	3100
WSTC	4060
MVRD	6682

TD: 8776 TVD: 8776 PBTD: 8703

STATE 1021-36G  
 1953' FNL & 1977' FEL  
 SWNE SEC. 36, T10S, R21E  
 UINTAH UT

KBE: 5437' API NUMBER: 4304736417  
 GLE: 5424' LEASE NUMBER: ML-47060  
 TD: 8776' LAT/LONG: 39.906049/-109.497012  
 PBDT: 8703'

CASING : 12.25" HOLE  
 SURFACE 9.625" 32.3# H-40 @ 1868'

PRODUCTION 7.875" HOLE  
 4.5" 11.6# I-80 @ 8762'  
 Est. TOC @ 660' CBL

PERFORATIONS: WASATCH-MESAVERDE TOP-BOTTOM 4726'-8676'

TUBING: 2.375" 4.7# J-55 TUBING @ 7675'

Tubular/Borehole	ID	Drift inches	Collapse psi	Burst psi	Capacities		
	inches				Gal./ft.	Cuft/ft.	Bbl./ft.
2.375" 4.7# J-55 tbg	1.995	1.901	8100	7700	0.1624	0.02171	0.00387
2.375" 4.7# P-110 tbg	1.995	1.901	13800	15400	0.1624	0.02171	0.00387
2.375" 4.7# L-80 tbg	1.995	1.901	11780	11200	0.1624	0.02171	0.00387
4.5" 11.6# I-80 csg	4	3.875	6350	7780	0.65282	0.08727	0.01554
9.625" 32.3# H-40 csg	9.001	8.845	1400	2270	3.30549	0.44188	0.0787

Annular Capacities	Gal./ft.	Cuft/ft.	Bbl./ft.
2.375" tbg. X 4.5" csg	0.42272	0.05651	0.01006
4.5" csg. X 9.625" csg	2.47927	0.33143	0.05903
4.5" csg X 7.875 borehole	1.70406	0.2278	0.04057

**GEOLOGIC INFORMATION:**

Formation	Depth to top, ft.
Uinta	Surface
Top Green River	924'
Top Mahogany	1663'
Base Parachute	2460'
Top Wasatch	4057'
Top Mesaverde	6660'

<http://digitallibrary.utah.gov/awweb/awarchive?type=file&item=55737>

BMSW Elevation ~2295' MSL  
 BMSW Depth ~3142'

**STATE 1021-36G PLUG & ABANDONMENT PROCEDURE**

**GENERAL**

- H2S MAY BE PRESENT. CHECK FOR H2S AND TAKE APPROPRIATE PRECAUTIONS.
- BLOW DOWN BRADEN HEAD AND SURFACE CASING AS NEEDED AS PER SOP.
- CEMENT QUANTITIES BELOW ASSUME NEAT CLASS G, 15.8ppg, YIELD 1.145 CUFT/SX. IF A DIFFERENT PRODUCT IS USED, WELLSITE PERSONNEL ARE RESPONSIBLE FOR CORRECTING QUANTITIES TO YIELD THE STATED SLURRY VOLUME.
- TREATED FRESH WATER WILL BE PLACED BETWEEN ALL PLUGS INSTEAD OF BRINE.
- ALL DISPLACEMENT FLUID SHALL CONTAIN CORROSION INHIBITOR AND BIOCIDES. PREMIX 5 GALLONS PER 100 BBLs FLUID AND IS TO BE PLACED BETWEEN ALL PLUGS.
- NOTIFY APPROPRIATE AGENCY 48 HOURS BEFORE MOVING ON LOCATION.

PERTINENT WELL HISTORY: SEAT NIPPLE. @ 7688', (LAST WORK OVER DECEMBER 2008)


**PROCEDURE**

**Note:** Approx. **113 SXS** Class "G" cement needed for procedure & **(2) 4.5" CIBP**

**Note: NO GYRO ON RECORD.** (IF GYRO NEEDED, A GPS READING WILL NEED TO BE TAKEN AT THE WELL SITE AND RECORDED IN OPENWELLS. PLEASE TAKE IT TO THE 6TH DECIMAL PLACE).

1. MIRU. KILL WELL AS NEEDED. ND WH, NU AND TEST BOPE.
2. POOH W/ TBG & L/D SAME. RU WIRELINE AND MAKE A GAUGE RING RUN TO CHECK FOR FILL PER FOREMAN DISCRETION.
3. ISOLATE MESAVERDE PERFORATIONS (> 6660'): RIH ON WIRELINE W/ 4.5" CIBP. SET @ ~6660'. RELEASE CIBP.
4. ISOLATE PERFORATIONS (8676'-4726'): RIH ON WIRELINE OR TUBING W/ 4.5" CIBP. SET @ ~4676', (50' above top perf at 4726'). RELEASE CIBP, PUH 10', CIRC ENTIRE HOLE W/ TREATED FRESH WATER AND PRESSURE TEST CASING. SET A 105FT BALANCED CMT PLUG F/ 4676' to 4571'(8 SXS, 9.16 FT3, 1.64 BBLs).
5. PROTECT WASATCH TOP (4057'): PUH WITH TUBING AND PUMP A MINIMUM OF (210FT) CMT F/ 4057' to 3847' (16 SXS, 18.32 FT3, 3.27 BBLs).
6. PROTECT BMSW (3142'): PUH WITH TUBING AND PUMP A MINIMUM OF (210FT) CMT F/ 3247' to 3037' (16 SXS, 18.32 FT3, 3.27 BBLs).
7. PROTECT PARACHUTE BASE (2460'): PUH WITH TUBING AND PUMP A MINIMUM OF (210FT) CMT F/ 2565' to 2355' (16 SXS, 18.32 FT3, 3.27 BBLs).
8. PROTECT CASING SHOE (1868'): PUH WITH TUBING AND PUMP A MINIMUM OF (105FT) CMT F/ 1920.5' to 1815.5' (8 SXS, 9.16 FT3, 1.64 BBLs).
9. PROTECT GREEN RIVER (924'): PUH WITH TUBING AND PUMP A MINIMUM OF (210FT) CMT F/ 1029' to 819' (16 SXS, 18.32 FT3, 3.27 BBLs).
10. PROTECT SURFACE (102'): POOH AND RIG UP WIRELINE. RIH WITH PERF GUNS FOR PRODUCTION CASING. PERFORATE CASING AT ~102' (TOC @ ~660'). PUMP A MINIMUM OF (37 SXS, 42.37 FT3, 7.55 BBLs) CMT TO FILL PRODUCTION CASING AND ANNULUS FROM 102' TO SURFACE.
11. CUT OFF WELLHEAD AND INSTALL MARKER PER REGULATIONS.
12. RDMO. TURN OVER TO OPERATIONS FOR SURFACE REHAB. SURFACE RECLAMATION TO BE PERFORMED IN ACCORDANCE TO REGULATIONS.

# STATE 1021-36G

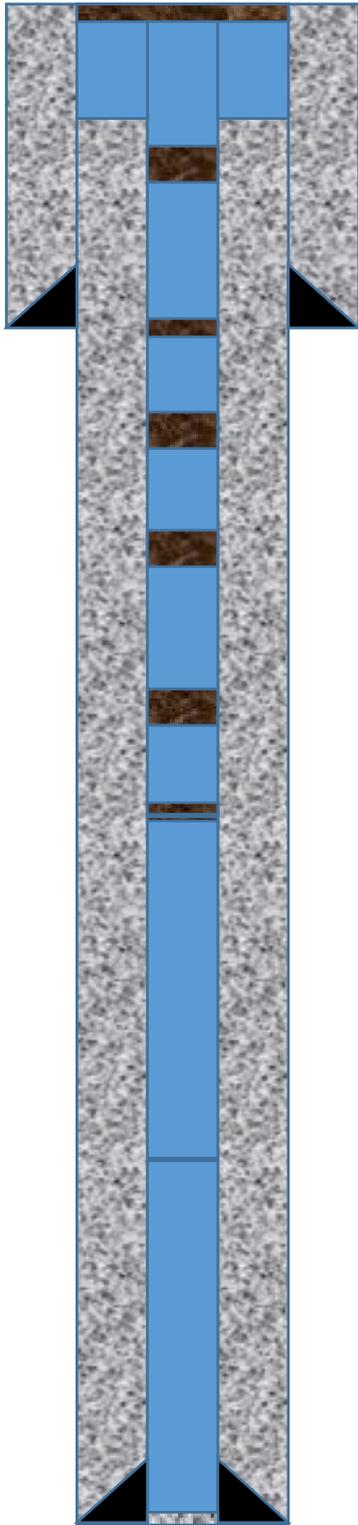

Total SXS: 113, Total CIBP: 2

<- Plug for Surface at 0' from 0' to 102' with 37SXS,102ft.

<- TOC at 660'

<- Plug for GreenRiver at 924' from 1029' to 819' with 16SXS,210ft.

<- Mahogany at 1663'

<- Plug for Surface Shoe at 1868' from 1920.5' to 1815.5' with 8SXS,105ft.

<- Plug for Parachute Base at 2460' from 2565' to 2355' with 16SXS,210ft.

<- Plug for BMSW at 3142' from 3247' to 3037' with 16SXS,210ft.

<- Plug for Wasatch at 4057' from 4057' to 3847' with 16SXS,210ft.

<- Plug above CIBP at 4676' from 4676' to 4571' with 8SXS,105ft.

<-CIBP Above Perfs at 4676'

<-Top Perf at 4726'

<-CIBP for Mesaverde at 6660'

<-PBSD at 8703'

<- Production Casing Shoe at 8762'

<-TD at 8776'

<b>STATE OF UTAH</b> DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	<b>FORM 9</b>
<b>5. LEASE DESIGNATION AND SERIAL NUMBER:</b> ML-47060	
<b>6. IF INDIAN, ALLOTTEE OR TRIBE NAME:</b>	
<b>7. UNIT or CA AGREEMENT NAME:</b> NATURAL BUTTES	
<b>8. WELL NAME and NUMBER:</b> STATE 1021-36G	
<b>9. API NUMBER:</b> 43047364170000	
<b>9. FIELD and POOL or WILDCAT:</b> NATURAL BUTTES	
<b>COUNTY:</b> Uintah	
<b>STATE:</b> UTAH	

**SUNDRY NOTICES AND REPORTS ON WELLS**  
 Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

<b>1. TYPE OF WELL</b> Gas Well	<b>11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA</b>
<b>2. NAME OF OPERATOR:</b> KERR-MCGEE OIL & GAS ONSHORE, L.P.	
<b>3. ADDRESS OF OPERATOR:</b> P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779	<b>PHONE NUMBER:</b> 720 929-6456
<b>4. LOCATION OF WELL</b> <b>FOOTAGES AT SURFACE:</b> 1953 FNL 1977 FEL <b>QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:</b> Qtr/Qtr: SWNE Section: 36 Township: 10.0S Range: 21.0E Meridian: S	

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input checked="" type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100px;" type="text"/>
<input checked="" type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: 8/12/2016			
<input type="checkbox"/> SPUD REPORT Date of Spud:			
<input type="checkbox"/> DRILLING REPORT Report Date:			

**12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.**  
 Kerr-McGee Oil & Gas Onshore, LP has plugged and abandoned the STATE 1021-36G well. Please see the operations summary report for details. Thank you.

**Accepted by the  
 Utah Division of  
 Oil, Gas and Mining  
 FOR RECORD ONLY  
 August 31, 2016**

<b>NAME (PLEASE PRINT)</b> Jennifer Thomas	<b>PHONE NUMBER</b> 720 929-6808	<b>TITLE</b> Regulatory Specialist
<b>SIGNATURE</b> N/A	<b>DATE</b> 8/15/2016	

US ROCKIES REGION  
**Operation Summary Report**

US ROCKIES REGION								
Operation Summary Report								
Well: STATE 1021-36G					Spud date: 5/24/2006			
Project: UTAH-UINTAH			Site: STATE 1021-36G			Rig name no.: MILES-GRAY 1/1		
Event: ABANDONMENT			Start date: 8/11/2016		End date: 8/12/2016			
Active datum: RKB @5,436.99usft (above Mean Sea Level)				UWI: STATE 1021-36G				
Date	Time Start-End	Duration (hr)	Phase	Code	Sub Code	P/U	MD from (usft)	Operation
8/11/2016	7:00 - 7:15	0.25	ABANDP	48	B	P		SAFETY = JSA.
	7:15 - 8:20	1.08	ABANDP	30	A	P		MIRU. SPOT IN ALL EQUIP.
	8:20 - 9:10	0.83	ABANDP	30	F	P		SICP & SITP= 450#. BLOW DOWN WELL TO FLOWBACK TANK. CNTRL TBG W/ 20BBLS TMAC. CNTRL CSNG W/ 20BBLS TMAC. NDWH. UN-LAND TBNG (NOT STUCK). LAND TBNG BACK ON HANGER. NUBOP. R/U FLOOR & TBNG EQUIP. UN-LAND TBNG. RMV HANGER.
	9:10 - 12:00	2.83	ABANDP	31	I	P		MIRU SCANNERS. POOH WHILE SCANNING 242JTS 2-3/8" J-55 TBNG. L/D ALL TBNG AS SINGLES FOR BETTER INSPECTION. SCAN RESULTS AS FOLLOWS:  Y-BND= 204JTS. 6470' R-BND= 38JTS. 1204'  RDMO SCANNERS.
	12:00 - 13:00	1.00	ABANDP	34	I	P		MIRU WIRELINE. P/U & RIH W/ GR-JB FOR 4-1/2" CSNG. RIH TO 6700' (GOOD). POOH E-LINE. L/D TOOLS. WIRELINE TRUCK BROKE DOWN WHILE THEY WERE P/U THE CIBP.
	13:00 - 14:30	1.50	ABANDP	46	E	Z		WAITING ON ANOTHER E-LINE TRUCK.
	14:30 - 17:30	3.00	ABANDP	34	I	P		MIRU NEW WIRELINE TRUCK. P/U & RIH W/ 4-1/2" WEATHERFORD CIBP. SET CIBP @ 6559'. POOH E-LINE & L/D TOOLS. P/U & RIH W/ DUMP BAILER (4 SEPERATE RUNS). SPOT 8SX 15.8# G CMT ON CIBP @ 6559'. POOH & L/D BAILER. SWIFN. SDFN.  NOTE: NOTIFIED CHRIS JENSEN W/ UDOGM THAT WE WERE STARTING W/ P&A OPERATIONS. HE SAID THAT HE MAY OR MAY NOT BE ABLE TO MAKE IT TO WITNESS THE P&A BUT TO PROCEED AS PLANNED.
8/12/2016	7:00 - 7:15	0.25	ABANDP	48	B	P		SAFETY = JSA.
	7:15 - 9:30	2.25	ABANDP	31	G	P		SICP = 100#. P/U & RIH W/ 4-1/2" WF CIBP + 147JTS 2-3/8" J-55 TBNG. SET CIBP @ 4676'. PUH 10'.
	9:30 - 9:50	0.33	ABANDP	31	H	P		BREAK CONV CIRC W/ TMAC. CIRC WELLBORE CLEAN & GAS FREE W/ 75BBLS TMAC.
	9:50 - 10:15	0.42	ABANDP	52	F	P		PRESSURE TEST 4-1/2" CSNG & 4-1/2" CIBP GOOD @ 500# FOR 15MIN. LOST 0# IN 15MIN. BLEED OFF PRESSURE.

## US ROCKIES REGION

## Operation Summary Report

Well: STATE 1021-36G		Spud date: 5/24/2006	
Project: UTAH-UINTAH		Site: STATE 1021-36G	Rig name no.: MILES-GRAY 1/1
Event: ABANDONMENT		Start date: 8/11/2016	End date: 8/12/2016
Active datum: RKB @5,436.99usft (above Mean Sea Level)		UWI: STATE 1021-36G	

Date	Time Start-End	Duration (hr)	Phase	Code	Sub Code	P/U	MD from (usft)	Operation
	10:15 - 14:30	4.25	ABANDP	51	D	P		<p>MIRU CMT CREW. ALL CMT PUMPED @ 15.8# AND IS G CMT. POOH W/ TBNG WHILE PUMPING CMT PLUGS AS FOLLOWS:</p> <p>#1. CIBP @ 4676'. PUMP 2.6BBL FRESH WATER. PUMP 10SX G CMT. DISPLACE W/ 1BBL FRESH WATER &amp; 16.5BBLS TMAC. PUH TBNG.</p> <p>#2. EOT @4057'. PUMP 2.6BBL FRESH WATER. PUMP 16SX G CMT. DISPLACE W/ 1BBL FRESH WATER &amp; 13.8BBLS TMAC. PUH TBNG.</p> <p>#3. EOT @ 3247'. PUMP 2.6BBL FRESH WATER. PUMP 16SX G CMT. DISPLAE W/ 1BBL FRESH WATER &amp; 10.6BBLS TMAC. PUH TBNG.</p> <p>#4. EOT @ 2565'. PUMP 2.6BBL FRESH WATER. PUMP 16SX G CMT. DISPLACE W/ 1BBL FRESH WATER &amp; 8BBLS TMAC. PUH TBNG.</p> <p>#5. EOT @ 1920'. PUMP 2.6BBL FRESH WATER. PUMP 10SX G CMT. DISPLACE W/ 1BBL FRESH WATER &amp; 5.8BBLS TMAC. PUH TBNG.</p> <p>#6. EOT @ 1029'. PUMP 2.6BBL FRESH WATER. PUMP 16SX G CMT. DISPLACE W/ 1BBL FRESH WATER &amp; 2.1BBLS TMAC. POOH WHILE L/D ALL TBNG.</p>
	14:30 - 15:00	0.50	ABANDP	34	H	P		<p>MIRU WIRELINE. P/U &amp; RIH W/ 4-1/2" CSNG SQZ GUN. 4SPF X 1' GUN. PERF 4-1/2" PRODUCTION CSNG @ 102'. POOH E-LINE. RDMO E-LINE. TRY TO PUMP INTO SQZ HOLES BUT COULD NOT INJECT. PRESSURE UP TO 500# AND DID NOT BLEED OFF.</p>
	15:00 - 17:00	2.00	ABANDP	51	D	P		<p>MIRU ROUSTABOUT CREW. EXPOSE WELLHEAD. CUT &amp; LOWER WELLHEAD. FOUND CMT @ SURFACE IN 9-5/8" CSNG. RIH W/ 100' 1" TBNG DOWN 4-1/2" CSNG. MIX AND PUMP 16SX G CMT UNTIL FULL @ SURFACE. CMT STAYED FULL. CAP WELL. BACKFILL WELLHEAD. P&amp;A COMPLETE.</p> <p>WELLHEAD COORDINATES.</p> <p>LAT:39.906049 LONG: -109.497012</p> <p>NOTE: CONTACTED CHRIS JENSEN W/ UDOGM &amp; NOTIFIED HIM OF P&amp;A ACTIVITIES. HE SAID THAT HE WOULD NOT BE ABLE TO MAKE IT ONTO LOCATION AND TO PROCEED AS PLANNED.</p>